

WAAS CH 82416 W05A	APP CRS 046°	Rwy Ldg TDZE Apt Elev	5320 16 17
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 5

SOUTHWEST OREGON RGNL (OTH)

RNP APCH.

▼


▲

Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LPV all Cats visibility to ½ SM, LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 6000 direct RUNUE and on track 015° to RARES and hold, continue climb-in-hold to 6000.

AWOS-3PT 135.075	SEATTLE CENTER 127.55 254.35	NORTH BEND TOWER* 118.45 (CTAF) 0	GND CON 127.1
----------------------------	--	---	-------------------------

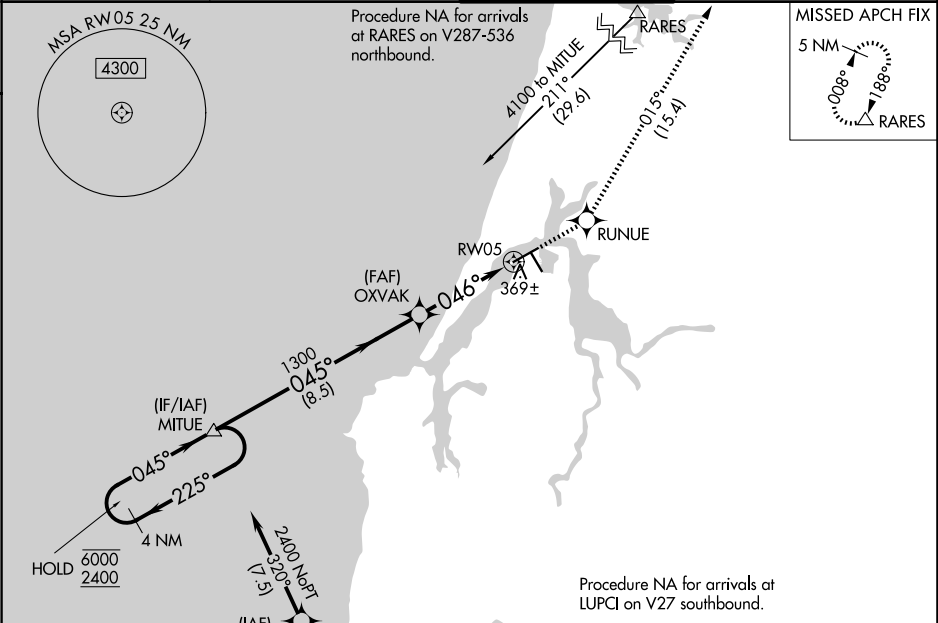

ELEV 17 D TDZE 16

4 NM Holding Pattern
6000 ← 225°
2400 → 045°
GP 3.00°
TCH 51

MITUE

OXVAK
1300
*1.7 NM to RW05
*LNAV only

RUNUE
6000

RARES
tr 015°

RW05
1700

8.5 NM 2.2 NM 1.7 NM

CATEGORY	A	B	C	D
LPV DA		319-1½	303 (400-½)	
LNAV/VNAV DA		550-1¾	534 (600-1¾)	
LNAV MDA	620-½	604 (700-½)	620-1¾	604 (700-1¾)
CIRCLING	680-1 663 (700-1)	820-1 803 (900-1)	1100-3 1083 (1100-3)	1160-3 1143 (1200-3)

HIRL Rwy 5-23
MIRL Rwy 13-31
REIL Rwys 13, 23 and 31

5980 X 150
4420 X 150
TWR

046°

31

NW-1, 30 OCT 2025 to 27 NOV 2025

NW-1, 30 OCT 2025 to 27 NOV 2025