

WAAS CH 90199 W28A	APP CRS 288°	Rwy Ldg TDZE 341 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 28

CAPE GIRARDEAU RGNL (CGI)

RNP APCH - GPS.

▼


⚠

When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 771 feet and all visibilities $\frac{1}{2}$ SM. Increase LNAV/VNAV DA to 896 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cats C/D $\frac{1}{4}$ SM. VDP NA when using Cairo Rgnl altimeter setting. Rwy 28 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For inop ALS, increase LPV Cat A/B visibility to $1\frac{1}{2}$ SM. Inop table does not apply to LNAV/VNAV all Cats. For inop ALS when using Cairo altimeter setting, increase LPV Cat A/B visibility to $1\frac{1}{2}$ SM. Baro-VNAV NA.

ODALS

MISSED APPROACH:
Climb to 3000 direct
IYIGO and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

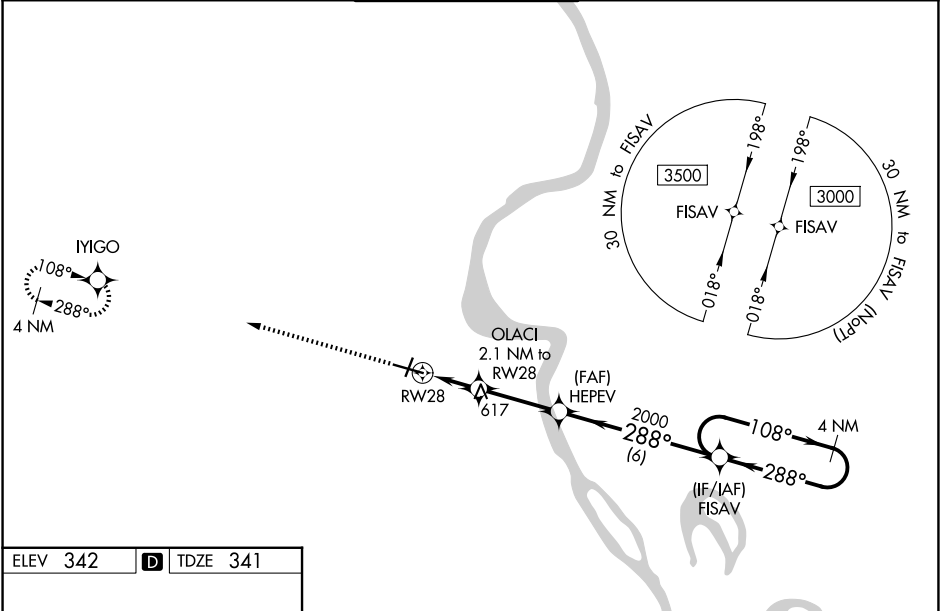

ELEV 342 **D** TDZE 341

MIRM Rwy 2-20 **0**
HIRM Rwy 10-28 **0**

3000

↑

IYIGO

✦

OLACI

2.1 NM to RW28

HEPEV

2000

FISAV

4 NM Holding Pattern

1.6 NM to RW28

1.6 NM

0.5 NM

3 NM

6 NM

1040

2000

288°

108°

288°

3000

GP 3.00°

TCH 38

CATEGORY	A	B	C	D
LPV DA	723-1 382 (400-1)			
LNAV/VNAV DA	848-1 ³ / ₈ 507 (600-1 ³ / ₈)			
LNAV MDA	880- ³ / ₄	539 (600- ³ / ₄)	880-1 ³ / ₈	539 (600-1 ³ / ₈)
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1 ³ / ₄ 658 (700-1 ³ / ₄)	1080-2 ¹ / ₄ 738 (800-2 ¹ / ₄)