LOC/DME I-RFD 109.3 Chan 30	APP CRS 008°	Rwy Ldg 8199 TDZE 729 Apt Elev 742

ILS or LOC RWY 1
CHICAGO/ROCKFORD INTL (RFD)

DME or RADAR required.

ASR — Inop table does not apply to S-ILS. For inop ALS, increase S-LOC 1 Cat C/D visibility to RVR 5500.

MALSR — MISSED APPROACH: Climb to 2600 on I-RFD localizer N course (008°) to TODDY/4.6 DME/RADAR and hold, continue climb-in-hold to 2600.

ATIS	ROCKFORD APP CON	ROCKFORD TOWER	GND CON
127.6	121.0 327.0	118.1 290.375	121.9 290.375

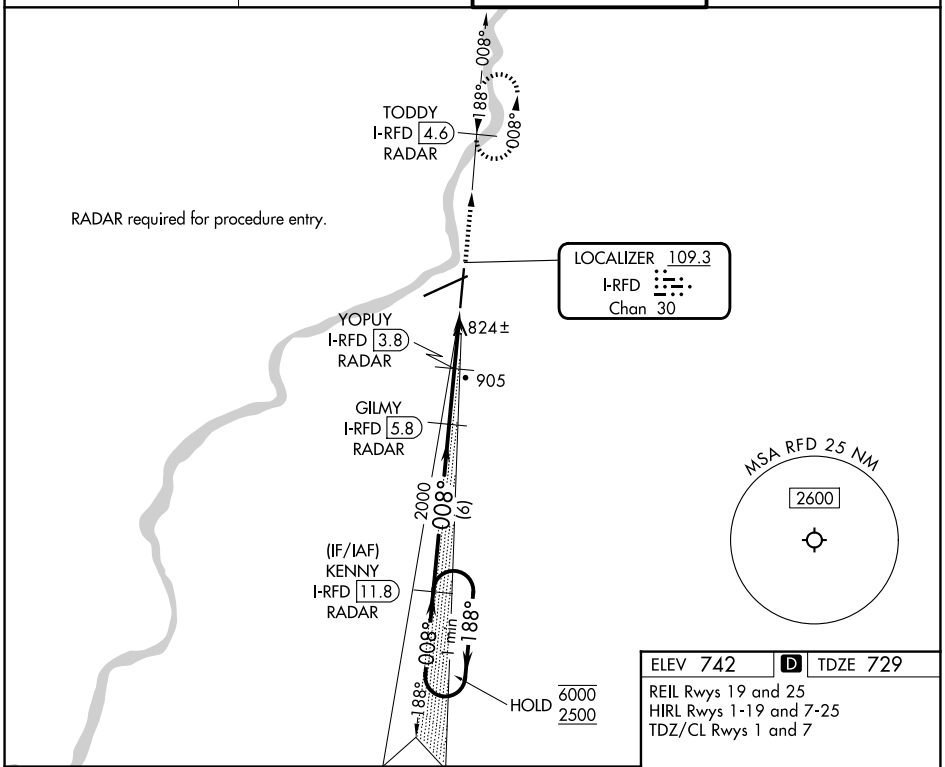

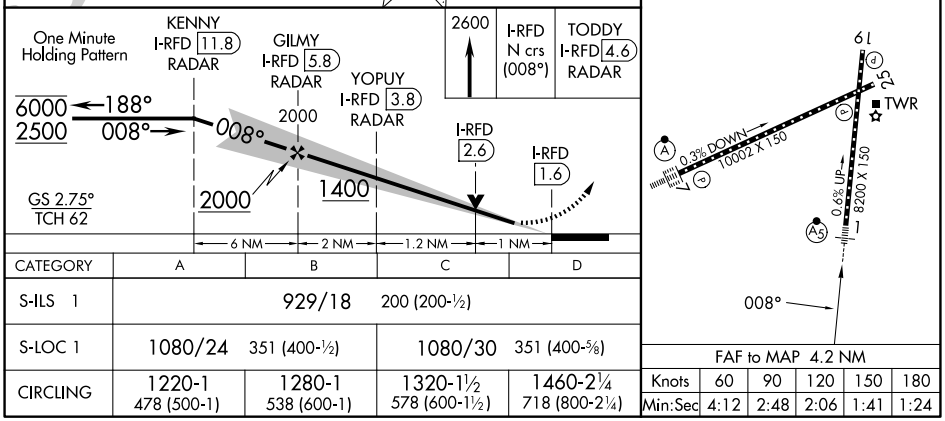

CATEGORY	A	B	C	D
S-ILS 1	929/18 200 (200-½)			
S-LOC 1	1080/24 351 (400-½)		1080/30 351 (400-⅝)	
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

EC-3, 30 OCT 2025 to 27 NOV 2025
EC-3, 30 OCT 2025 to 27 NOV 2025