
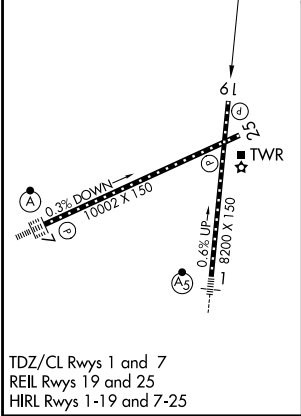



WAAS CH 40435 W19A	APP CRS 188°	Rwy Ldg TDZE 736 Apt Elev 742
--	------------------------	---

RNAV (GPS) RWY 19

CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2500 direct CONAN and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.				
ASR	ATIS 127.6	ROCKFORD APP CON 121.0 327.0	ROCKFORD TOWER 118.1 290.375	GND CON 121.9 290.375

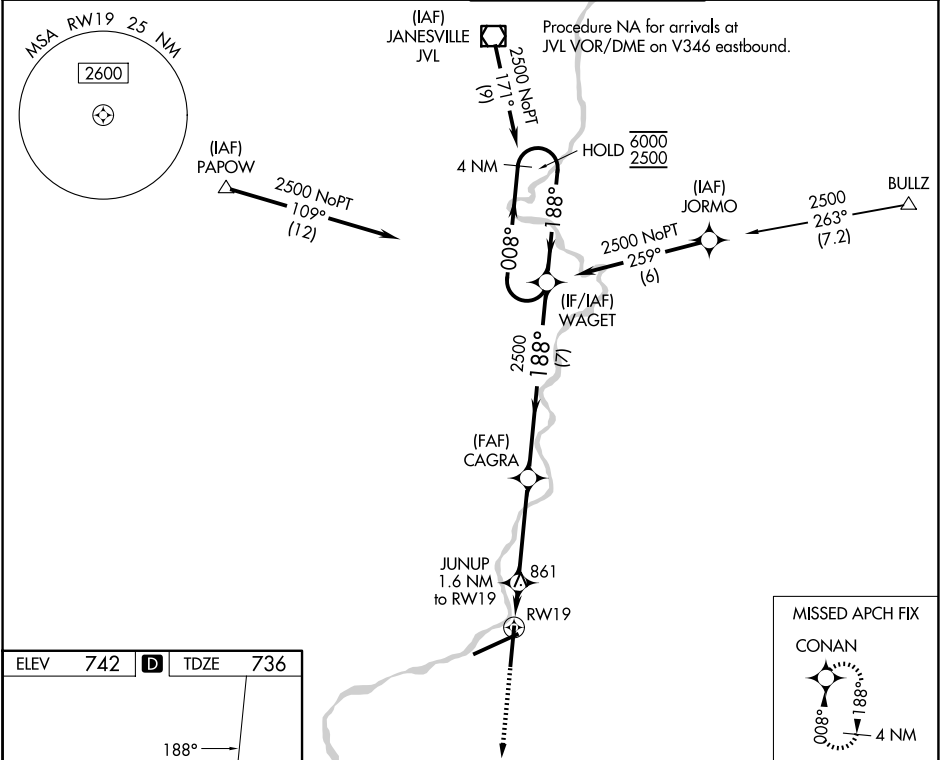

2500 ↑		CONAN 		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		4 NM Holding Pattern	
		JUNUP 1.6 NM to RW19		CAGRA 2500		WAGET	
		1 NM to RW19		1280		188° → 008° → 6000 ← 188° ← 2500	
1 NM		0.6 NM		3.8 NM		7 NM	
CATEGORY		A		B		C	
LPV DA				936-3/4 200 (200-3/4)			
LNAV/ VNAV DA				1039-7/8 303 (300-7/8)			
LNAV MDA		1120-1 384 (400-1)		1120-1 1/8 384 (400-1 1/8)			
CIRCLING		1220-1 478 (500-1)		1280-1 538 (600-1)		1320-1 1/2 578 (600-1 1/2) 1460-2 1/4 718 (800-2 1/4)	