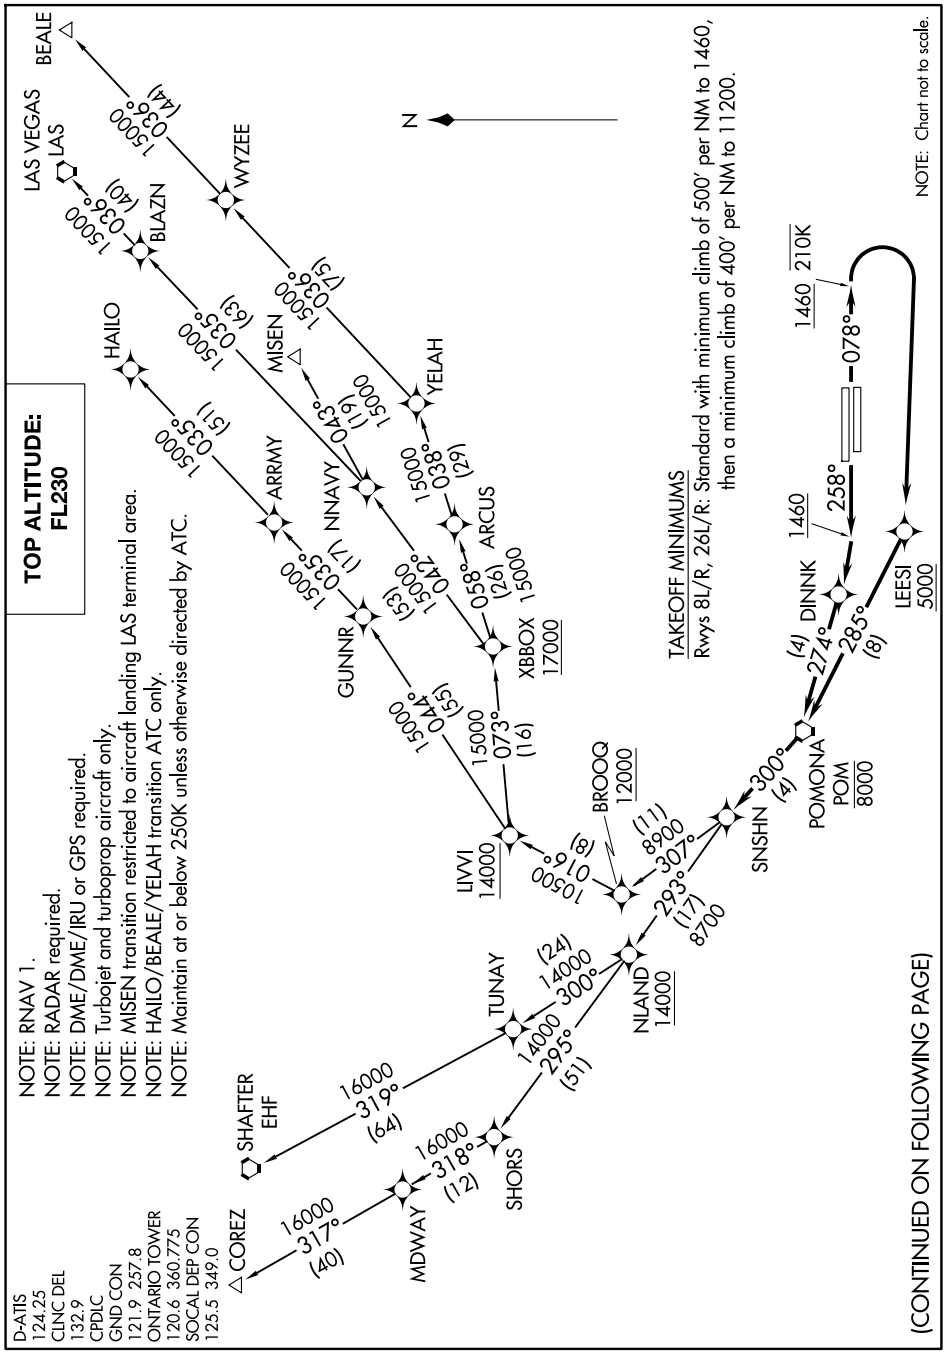
TOP ALTITUDE: FL230
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet and turboprop aircraft only.
NOTE: MISEN transition restricted to aircraft landing LAS terminal area.
NOTE: HAILO/BEALE/YELAH transition ATC only.
NOTE: Maintain at or below 250K unless otherwise directed by ATC.
D-ATIS 124.25
CLNC DEL 132.9
CPDLC
GND CON 121.9 257.8
ONTARIO TOWER 120.6 360.775
SOCAL DEP CON 125.5 349.0
COREZ
SHAFTER EHF
16000 317° (40)
MDWAY
16000 318° (12)
SHORS
16000 319° (64)
TUNAY
14000 295° (51)
(24) 14000 300°
NLAND 14000
LIVVI 14000
1050 016° (8)
BROOQ 12000
15000 073° (16)
XBBOX 17000
15000 058° (26)
ARCUS 15000
15000 038° (29)
YELAH
15000 042° (53)
NNAVY
15000 043° (19)
MISEN
15000 035° (63)
BLAZN
15000 036° (40)
LAS VEGAS LAS
15000 036° (44)
BEALE
15000 035° (75)
WYZEE
15000 035° (51)
HAILO
15000 035° (17)
ARRMY
15000 044° (55)
GUNNR
N
TAKEOFF MINIMUMS
Rwys 8L/R, 26L/R: Standard with minimum climb of 500' per NM to 1460, then a minimum climb of 400' per NM to 11200.
(11) 8900 307°
(17) 8700 293°
SNSHN
300° (4)
POMONA POM 8000
(4) 274° 285° (8)
DINNK 1460
258°
1460 210K
078°
LEESI 5000
NOTE: Chart not to scale.
(CONTINUED ON FOLLOWING PAGE)