

WAAS CH 69610 W03A	APP CRS 030°	Rwy Ldg 5204 TDZE 700 Apt Elev 708
--	------------------------	---

RNAV (GPS) RWY 3
CLINTON MUNI (CWI)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

▲ Baro-VNAV and VDP NA when using Davenport altimeter setting. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet.

MALSR



MISSED APPROACH: Climb to 2500 direct CUDMA and hold


AWOS-3PT
125.525

QUAD CITY APP CON ★
125.95 257.8


UNICOM
123.075 (CTAF) **L**

Procedure NA for arrivals at BILOX via V216 southwest bound and for arrivals at CVA VORTAC via V63 northbound.

MISSED APCH FIX
4 NM

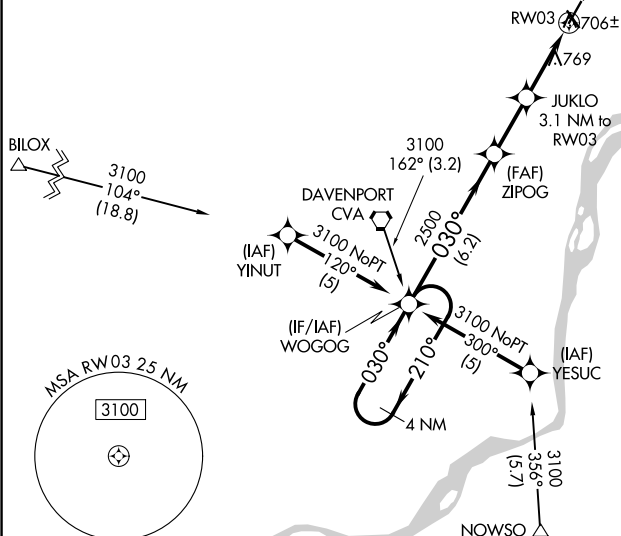

ELEV 708	D	TDZE 700
----------	----------	----------

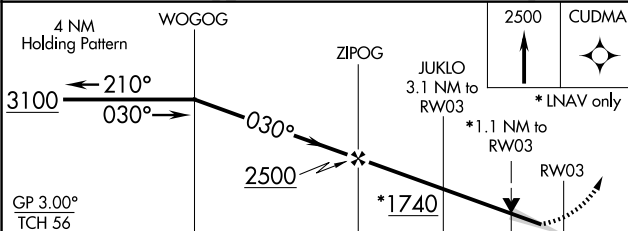

CATEGORY		A	B	C	D
LPV	DA	900- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)			NA
LNAV/ VNAV	DA	1039- $\frac{3}{4}$ 339 (400- $\frac{3}{4}$)			NA
LNAV	MDA	1020- $\frac{1}{2}$ 320 (400- $\frac{1}{2}$)			NA
CIRCLING		1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1 $\frac{1}{2}$ 532 (600-1 $\frac{1}{2}$)	NA

