

LOC I-GNV 111.3	APP CRS 286°	Rwy Ldg TDZE 122 Apt Elev 151
---------------------------	------------------------	---

ILS or LOC RWY 29

GAINESVILLE RGNL (GNV)

DME required. RADAR required for procedure entry at DANTE.


⚠

When local altimeter setting not received, use OCF altimeter setting and increase S-ILS 29 DA to 403 feet; increase all MDAs 100 feet and S-LOC 29 visibility Cat C/D to RVR 6000, and Circling visibility Cat C/D ½ SM. For inop ALS when using OCF altimeter setting, increase S-ILS 29 all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using OCF altimeter setting.)

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 on heading 140° and OCF VORTAC R-355 to JODON/OCF 16 DME and hold.

ATIS 127.15	JACKSONVILLE APP CON 118.175 338.25	GAINESVILLE TOWER★ 119.55 (CTAF) 0 353.7	GND CON 121.7	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

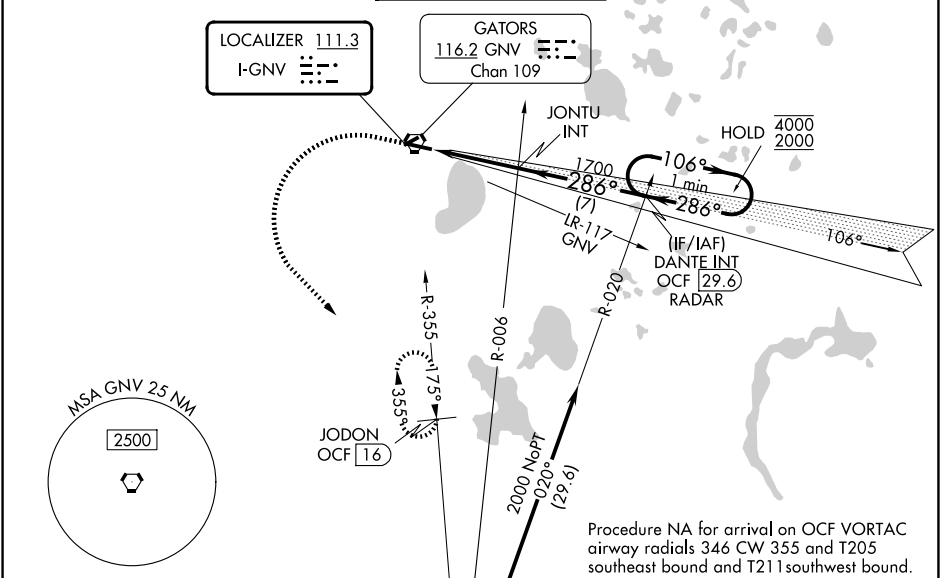

ELEV 151	TDZE 122
----------	----------

REIL Rwy 11
MIRL Rwy 7-25
HIRL Rwy 11-29

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

Diagram illustrating a flight path and navigation information for a holding pattern.

Navigation Information:

- IAF
- OCALA
- 113.7 OCF
- Chan 84

Altitude and Heading:

- 1100
- 2000
- OCF R-355
- JODON OCF 16
- hdg 140°

Navigation Points and Distances:

- DANTE INT OCF 29.6 RADAR
- One Minute Holding Pattern
- JONTU INT 1700
- 1700
- 286°
- 106°
- 4000
- 2000
- GP 3.00° TCH 54
- 4.8 NM
- 7 NM

Category and Altitude Ranges:

CATEGORY	A	B	C	D
S-ILS 29 *	322/24 200 (200-½)			
S-LOC 29	580/24	458 (500-½)	580/45	458 (500-¾)
CIRCLING	620-1 469 (500-1)	700-1 549 (600-1)	760-1¾ 609 (700-1¾)	820-2 669 (700-2)