

WAAS CH 99615 W12A	APP CRS 125°	Rwy Ldg TDZE Apt Elev	5301 1128 1156
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12


FORT DODGE RGNL (FOD)

RNP APCH.

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1447 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1495 feet; increase all MDAs 60 feet and Circling Cat C visibility ¼ SM. VDP and Baro-VNAV NA when using Webster City altimeter setting.


MISSED APPROACH: Climb to 3400
direct KINPE and hold.

AWOS-3PT 118.775	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

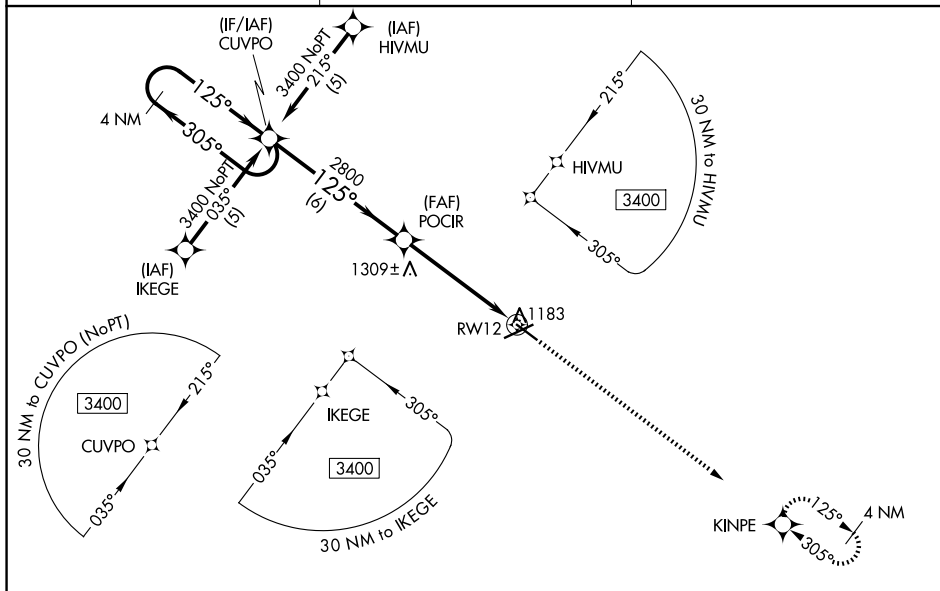


NC-3, 30 OCT 2025 to 27 NOV 2025

ELEV 1156	D	TDZE 1128
-----------	----------	-----------

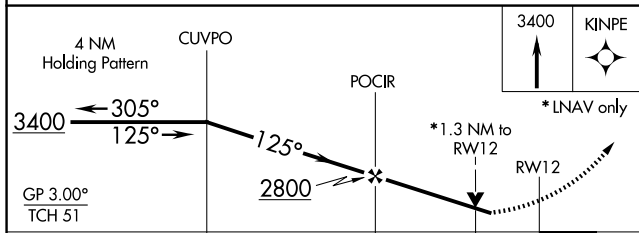

CATEGORY	A	B	C	D
LPV DA	1405-1 277 (300-1)			
LNAV/ VNAV DA	1453-1¼ 325 (300-1¼)			
LNAV MDA	1560-1	432 (500-1)	1560-1¼ 432 (500-1¼)	1560-1½ 432 (500-1½)
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

MIRL Rwy 12-30 **L**

HIRL Rwy 6-24 ●

REIL Rwy 12, 24 and 30 L