

WAAS CH 45815 W24A	APP CRS 243°	Rwy Ldg TDZE 1156 Apt Elev 1156
--	------------------------	---

RNAV (GPS) RWY 24

FORT DODGE RGNL (FOD)

RNP APCH


▼

▲

Baro-VNAV and VDP NA when using Webster City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1448 feet; increase LNAV/VNAV DA to 1546 feet; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct
GEGQI and hold.

AWOS-3PT 118.775	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 123.0 (CTAF) 1
----------------------------	--	---------------------------------

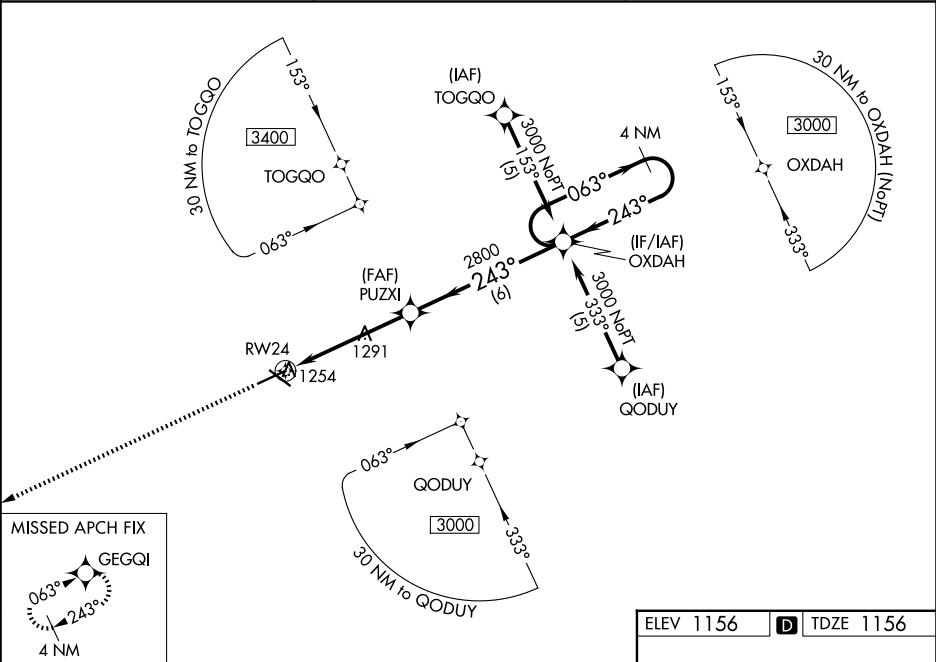

3000 ↑ GEGQI	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).			
*LNAV only.				
</				

ELEV 1156 **D** TDZE 1156

HIRL Rwy 6-24 **1**
MIRL Rwy 12-30 **1**
REIL Rwys 12, 24 and 30 **1**