

WAAS
CH **78001**
W32A

APP CRS
317°

Rwy Ldg
TDZE **102**
Apt Elev **107**

RNAV (GPS) RWY 32

MC ALLEN INTL (MFE)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and LNAV/VNAV all Cat visibility ¼ mile; increase all MDA 40 feet and LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Weslaco altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct SANCA and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER * 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	-------------------------

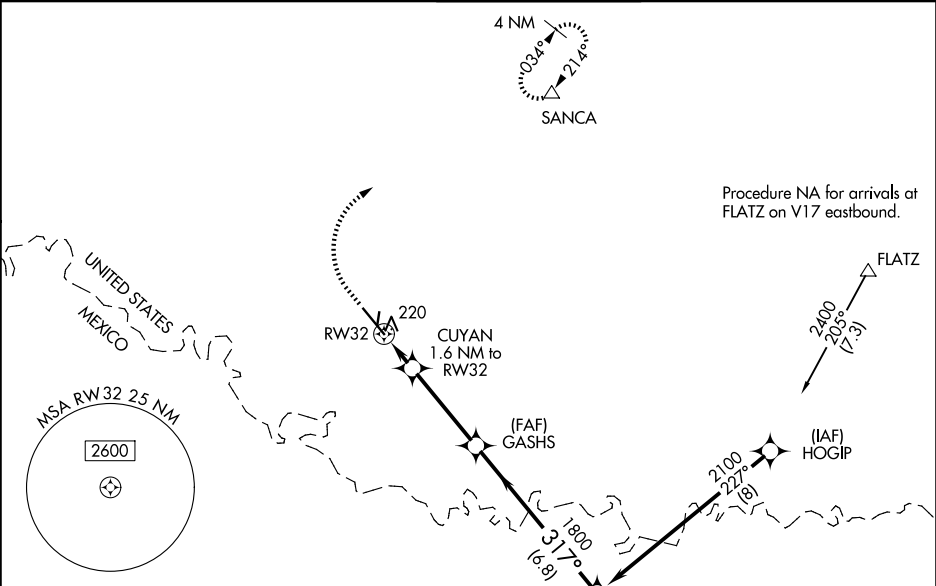

ELEV 107

D

TDZE 102

800

2000

SANCA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 53).

*LNAV only

FOVUD

GASHS

CUYAN

RWY 32

2100

1800

1600

660

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA		302-¾	200 (200-¾)	
LNAV/VNAV DA		391-⅞	289 (300-⅞)	
LNAV MDA		480-1	378 (400-1)	
CIRCLING	580-1	473 (500-1)	580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)

REIL Rwy 32

HIRL Rwy 14-32 0

MIRL Rwy 18-36 0