
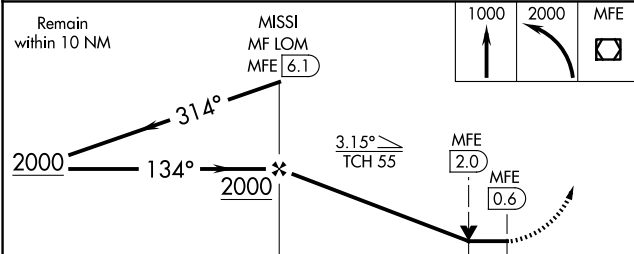


VOR/DME MFE	APP CRS	Rwy Ldg
117.2	134°	6983
Chan 119		TDZE 107
		Apt Elev 107

VOR RWY 14
MC ALLEN INTL (MFE)

⚠ Circling NA northeast of Rwy 14-32. ADF or DME required. For inop MALSR, increase S-14 Cat C/D visibility to 1½ mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-14 Cat C/D and Circling Cat C visibility ½ mile. VDP NA when using Weslaco altimeter setting.			MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold.	
ATIS	VALLEY APP CON	MC ALLEN TOWER ★	GND CON	UNICOM	
128.5	126.55 377.2	118.5 (CTAF) 0 256.9	121.8	122.95	

ADF or DME REQUIRED

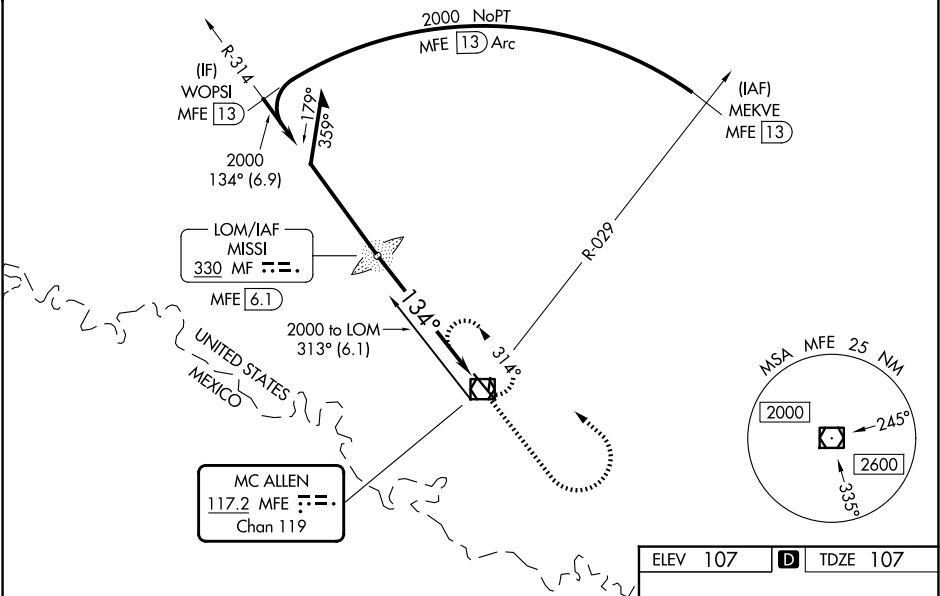

CATEGORY	A	B	C	D
S-14	620-½ 513 (600-½)		620-1 513 (600-1)	
CIRCLING	620-1 513 (600-1)		620-1½ 513 (600-½)	800-2¼ 693 (700-2¼)

