


WAAS CH 53617 W14A	APP CRS 139°	Rwy Idg 5608 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 14
ARANSAS COUNTY (RKP)


⚠ Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH:
Climb to 2000 direct PITYI and hold.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

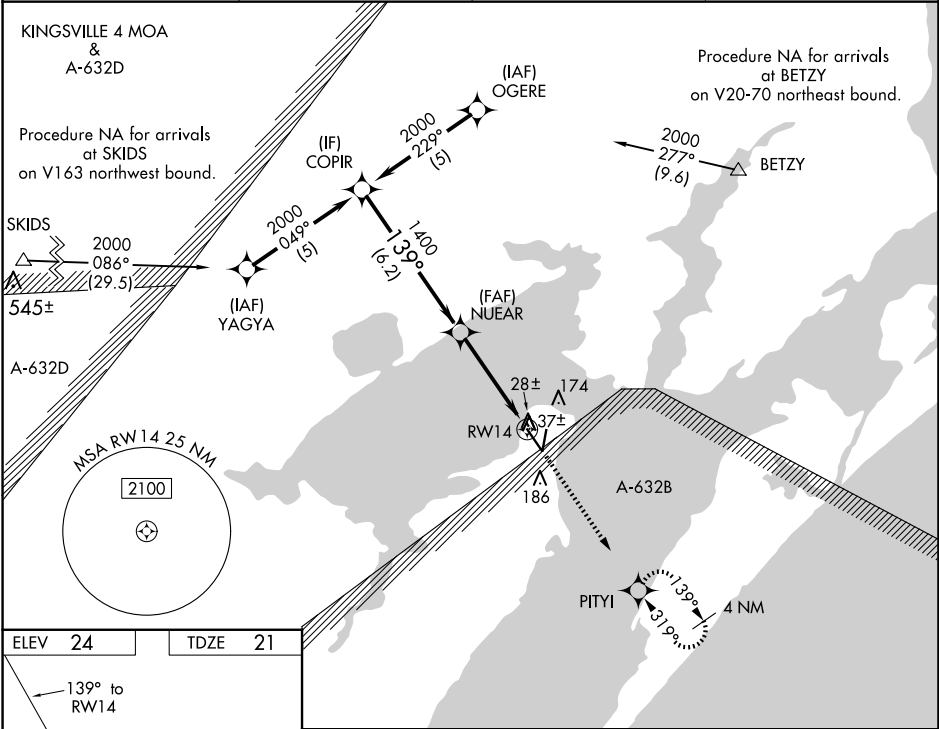

ELEV 24	TDZE 21
----------------	----------------

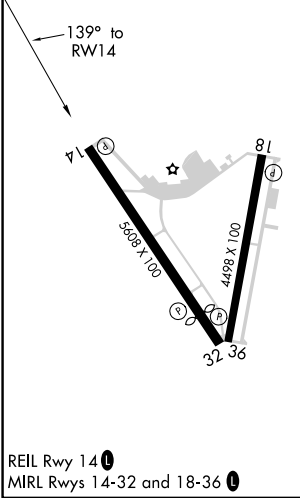

Procedure Turn NA		COPIR		* LNAV only		2000 ↑		PITYI ✦	
2000		139°		1400		* 0.9 NM to RW14		RW14	
GP 3.00° TCH 35		1400		6.2 NM		3.3 NM		0.9 NM	
CATEGORY	A		B		C		D		
LPV DA	271-1		250 (300-1)				NA		
LNAV/ VNAV DA	378-1¼		357 (400-1¼)				NA		
LNAV MDA	320-1		299 (300-1)				NA		
CIRCLING	500-1		476 (500-1)		500-1½ 476 (500-1½)		NA		

SC-3, 30 OCT 2025 to 27 NOV 2025

SC-3, 30 OCT 2025 to 27 NOV 2025