

WAAS CH 48940 W13A	APP CRS 129°	Rwy Idg 5012 TDZE 54 Apt Elev 55
--	------------------------	---


RNAV (GPS) RWY 13
KNOX COUNTY RGNL (RKD)

▼ DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Wiscasset altimeter setting. When local altimeter setting not received, use Wiscasset altimeter setting and increase LPV DA to 319 feet, LNAV/VNAV DA to 467 feet and all MDA 80 feet. Increase LNAV/VNAV visibility all Cats to 1 SM, LNAV Cat C/D to 1 SM and Circling Cat C to 2 1/4 SM. For inop ALS increase LNAV/VNAV all Cats visibility to 1 1/2 SM. For inop ALS when using Wiscasset altimeter setting increase LPV all Cats visibility to 7/8 SM, LNAV/VNAV all Cats visibility to 1 1/8 SM and LNAV Cat C/D to 1 1/8 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).



MISSED APPROACH:
Climb to 800 then
climbing right turn to
2400 direct AVMAW
and hold.

AWOS-3PT 119.025	PORTLAND APP CON ★ 120.4 299.2	CLNC DEL 123.8	UNICOM 123.05 (CTAF) ①
----------------------------	--	--------------------------	----------------------------------

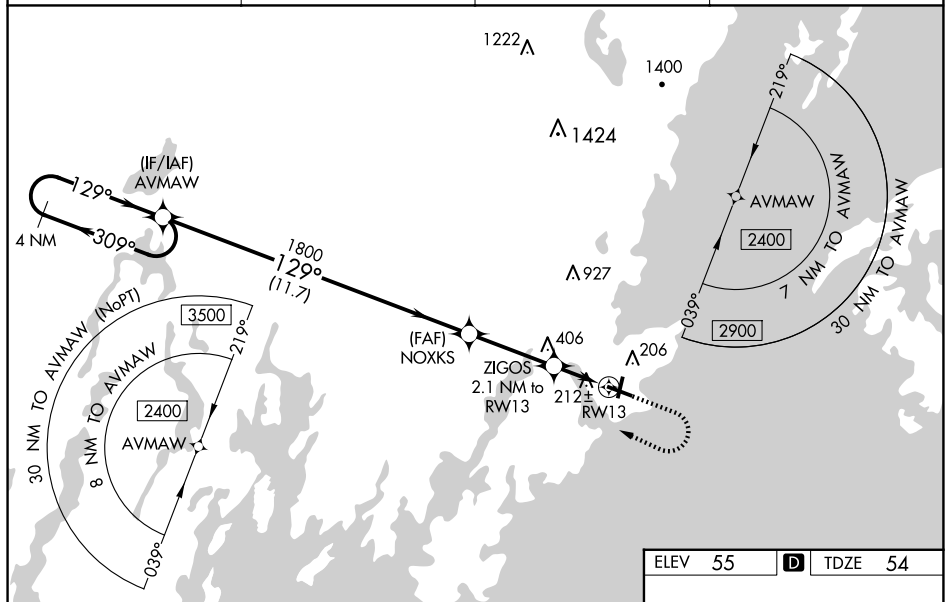

NE-1, 30 OCT 2025 to 27 NOV 2025

[illegible]

CATEGORY		A	B	C	D
LPV	DA	254- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)			
LNAV/ VNAV	DA	402- $\frac{3}{4}$ 348 (400- $\frac{3}{4}$)			
LNAV	MDA	480- $\frac{1}{2}$ 426 (500- $\frac{1}{2}$)		480- $\frac{3}{4}$ 426 (500- $\frac{3}{4}$)	
 CIRCLING		580-1 525 (600-1)		720-1 $\frac{3}{4}$ 665 (700-1 $\frac{3}{4}$)	1140-3 1085 (1100-3)