

HI-VOR or TACAN RWY 15


|                                              |                         |                                                                 |
|----------------------------------------------|-------------------------|-----------------------------------------------------------------|
| VORTAC CDB<br><b>112.6</b><br>Chan <b>73</b> | APCH CRS<br><b>145°</b> | Rwy Idg <b>10,179</b><br>TDZE <b>75</b><br>Arpt Elev <b>100</b> |
|----------------------------------------------|-------------------------|-----------------------------------------------------------------|

AL-1241 [USAF]

COLD BAY (CDB) (PACD)

|                                                                                              |           |                                                                                                                                    |
|----------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------|
| DME required                                                                                 | MALSR<br> | MISSED APPROACH: Climb to 1200, then climbing left turn to 3000 direct CDB VORTAC, then on CDB R-329 to DEADS/CDB 10 DME and hold. |
| * When ALS inop, increase vis to 1 1/2 miles.<br>** Circling not authorized SW of Rwy 15-33. |           |                                                                                                                                    |

|                                        |                                         |                       |
|----------------------------------------|-----------------------------------------|-----------------------|
| ANCHORAGE CENTER<br><b>118.5 278.3</b> | COLD BAY RADIO<br><b>123.6 (CTAF) 0</b> | ASOS<br><b>135.75</b> |
|----------------------------------------|-----------------------------------------|-----------------------|

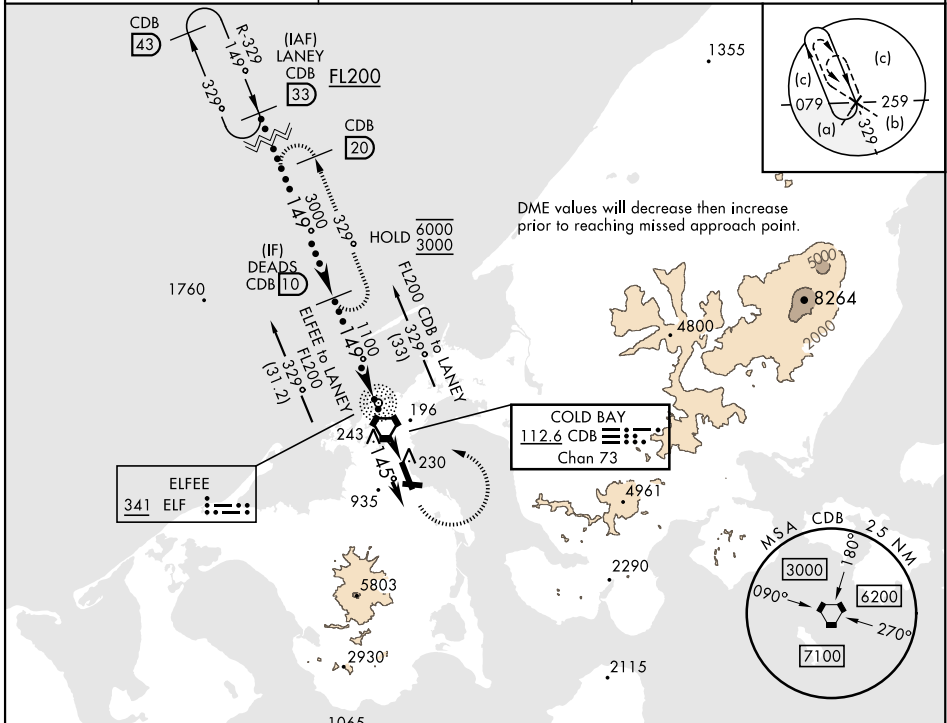

|                              |                              |                              |                      |
|------------------------------|------------------------------|------------------------------|----------------------|
| EMERG SAFE ALT 100 NM 11,600 |                              |                              |                      |
|                              |                              |                              |                      |
| CATEGORY                     | C                            | D                            | E                    |
| S-15*                        | 540/50                       | 465                          | (500-1)              |
| CIRCLING**                   | 560-1 1/2<br>460 (500-1 1/2) | 860-2 1/2<br>760 (800-2 1/2) | 940-3<br>840 (900-3) |

HI-VOR or TACAN RWY 15