
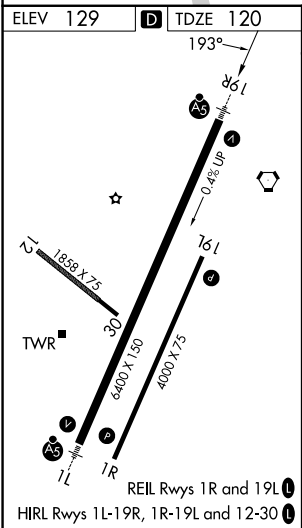


WAAS CH 70507 W19A	APP CRS 193°	Rwy Ldg 6400 TDZE 120 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 19R
BETHEL (BET)(PABE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.		MALSR	MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLL and hold.
ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER★ 118.7 (CTAF) 0	GND CON 121.7

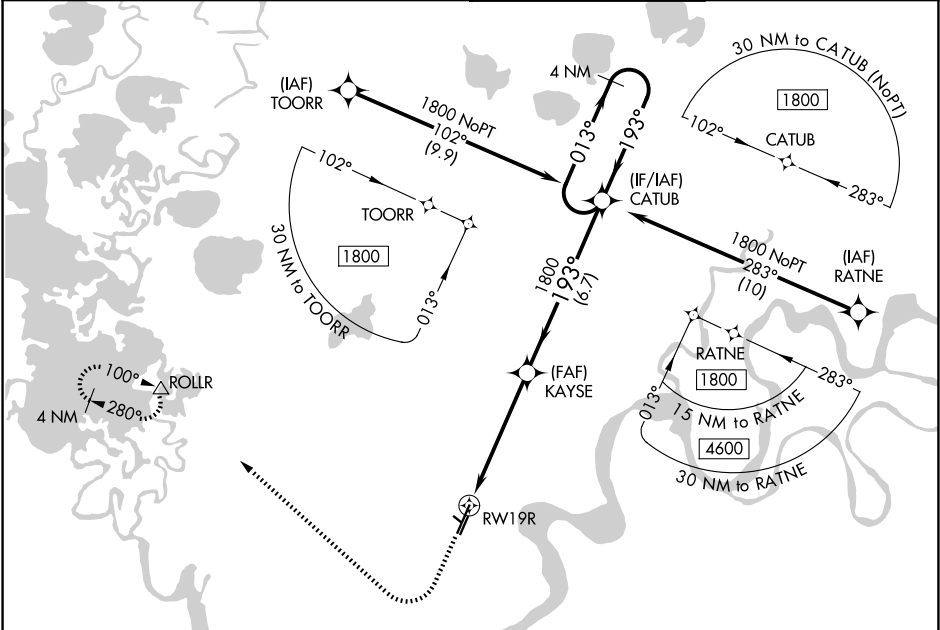

1700	2000	ROLLR		
* LNAV only				
1.3 NM 3.9 NM 6.7 NM				
CATEGORY	A	B	C	D
LPV	DA	320/24 200 (200-½)		
LNAV/ VNAV	DA	479/40 359 (400-¾)		
LNAV	MDA	560/24 440 (500-½)		560/45 440 (500-¾)
CIRCLING	560-1 431 (500-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)