
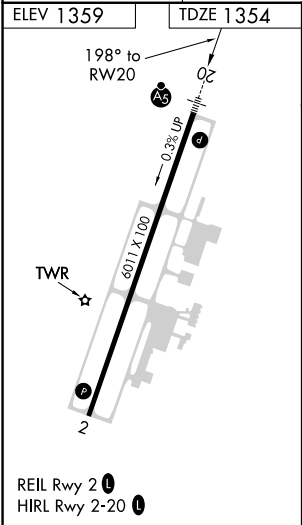



WAAS CH 40003 W20A	APP CRS 198°	Rwy Idg TDZE 1354 Apt Elev 1359
--	------------------------	---

RNAV (GPS) RWY 20
ROGERS EXEC - CARTER FLD (R.O.G)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		MALSR 	MISSED APPROACH: Climb to 3100 direct HONON and hold.	
AWOS-3PT 134.375	RAZORBACK APP CON* 126.6 305.2	ROGERS TOWER* 119.375 (CTAF)	GND CON 118.0	CLNC DEL 121.75 (When twr closed)

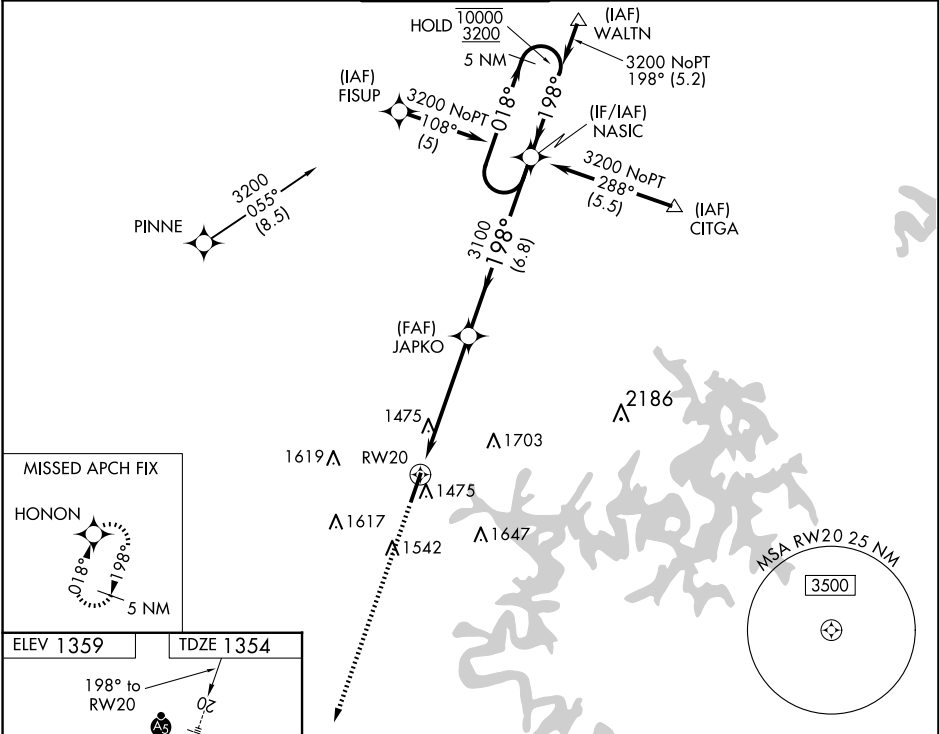

3100 HONON		VGSI and RNAV glidepath not coincident (VGSI angle 3.00/TCH 55).		5 NM Holding Pattern	
1.1 NM to RW20		JAPKO 3100		018° → 10000 3200	
1.1 NM		4.2 NM		6.8 NM	
CATEGORY	A	B	C	D	
LPV DA		1604-½	250 (300-½)		
LNAV/VNAV DA		1720-⅝	366 (400-⅝)		
LNAV MDA	1740-½	386 (400-½)	1740-⅝	386 (400-⅝)	
CIRCLING	1840-1	481 (500-1)	2020-1¾ 661 (700-1¾)	2020-2 661 (700-2)	