

WAAS CH 53537 W21A	APP CRS 205°	Rwy Ldg 5197 TDZE 935 Apt Elev 937
--	------------------------	---


RNAV (GPS) RWY 21
DELAWARE COUNTY RGNL (MIE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility $\frac{3}{8}$ mile and LNAV/VNAV all Cats and Circling Cats C/D visibility $\frac{1}{2}$ mile.



▲ Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2800 direct
APPAL and hold.


ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

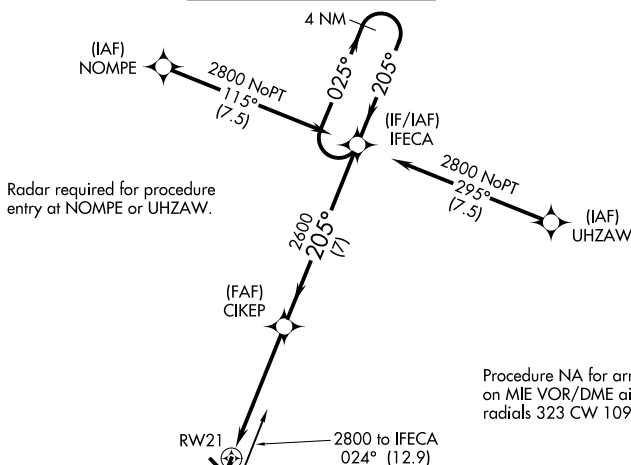

Procedure NA for arrival
on MIE VOR/DME airway
radials 323 CW 109.



ELEV	937	D	TDZE	935
------	-----	----------	------	-----



HIRL Rwy 14-32 **L**
MIRL Rwy 3-21 **L**
REIL Rwy 3, 14 and 21 **L**

The diagram illustrates the IFECA Holding Pattern, which is a 4 NM pattern. Key features include:

- Navigation Aids:** APPAL (VOR/DME) at 2800 MHz, RW21 (RNAV), CIKEP (DME), and IFECA (VORTAC).
- Holding Pattern:** A 4 NM holding pattern centered on IFECA, with inbound and outbound legs at 205°.
- Distances:**
 - 1.3 NM from RW21 to the start of the holding pattern.
 - 3.8 NM from RW21 to CIKEP.
 - 7 NM from CIKEP to IFECA.
- Altitudes:** GP 3.00° TCH 45' at IFECA.