

LOC/DME I-CRP	APP CRS	Rwy Ldg	7510
110.3	132°	TDZE	46
Chan 40		Apt Elev	46


ILS or LOC RWY 13
CORPUS CHRISTI INTL (CRP)

Autopilot coupled approach NA below 260.
For inop ALS, increase S-ILS 13 Cat E visibility to RVR 4000
and S-LOC 13 Cats C, D, and E visibility to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALS R

MISSED APPROACH: Climb to 500 then climbing
right turn to 2000 on heading 132° and CRP VORTAC
R-169 to SOLON INT/CRP VORTAC 28 DME and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

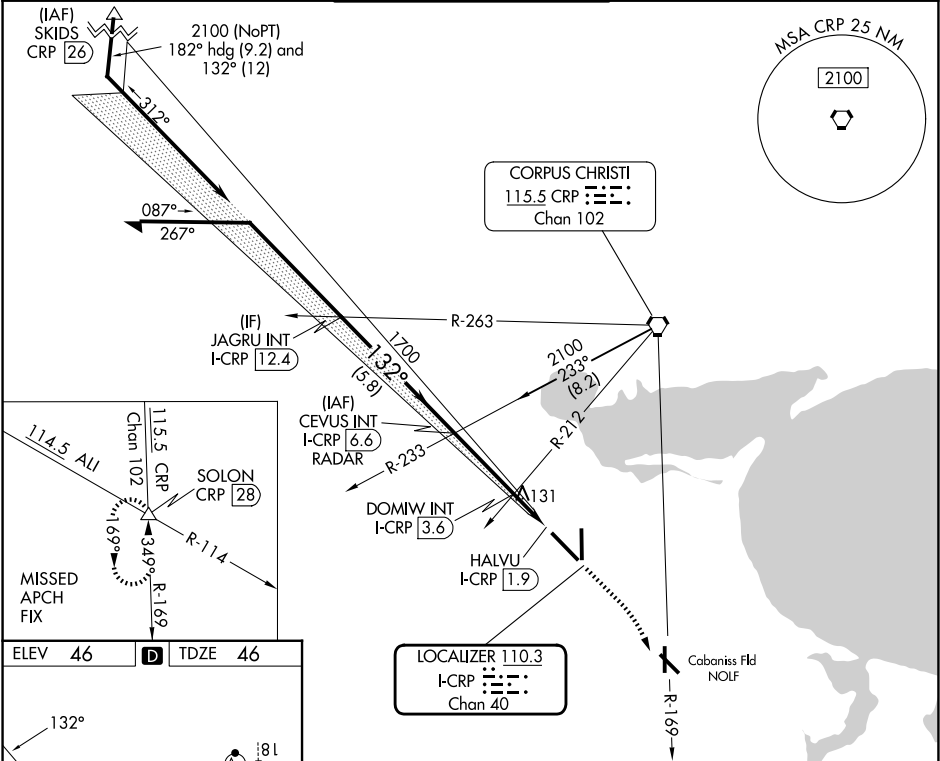

ELEV 46 D TDZE 46

Diagram showing the HIRL Rwy 13-31 and 18-36, FAF to MAP 4.7 NM, and various navigation aids like TWR, A5, and A36.

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

CATEGORY		A	B	C	D	E
S-ILS 13*		246/24 200 (200-½)				
S-LOC 13		400/24	354 (400-½)	400/30 354 (400-¾)		
CIRCLING		500-1 454 (500-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)