


|                                                 |                        |                                                             |                                                |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|------------------------------------------------|
| LOC/DME I-OYC<br><b>109.5</b><br>Chan <b>32</b> | APP CRS<br><b>355°</b> | Rwy Ldg <b>6080</b><br>TDZE <b>40</b><br>Apt Elev <b>46</b> | ILS or LOC RWY 36<br>CORPUS CHRISTI INTL (CRP) |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|------------------------------------------------|

|                                                                                                                                |           |                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------|
| DME required.<br>▼ For inop ALS, increase S-ILS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to RVR 4500. | MALSR<br> | MISSED APPROACH: Climb to 700 then climbing left turn to 2000 on heading 338° and CRP VORTAC R-287 to ATHIS INT/CRP 23.3 DME and hold. |
|--------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------|

|                      |                                        |                                    |                                |                           |
|----------------------|----------------------------------------|------------------------------------|--------------------------------|---------------------------|
| ATIS<br><b>126.8</b> | CORPUS APP CON<br><b>120.9 348.725</b> | CORPUS TOWER<br><b>119.4 257.8</b> | GND CON<br><b>121.9 269.15</b> | CLNC DEL<br><b>118.55</b> |
|----------------------|----------------------------------------|------------------------------------|--------------------------------|---------------------------|

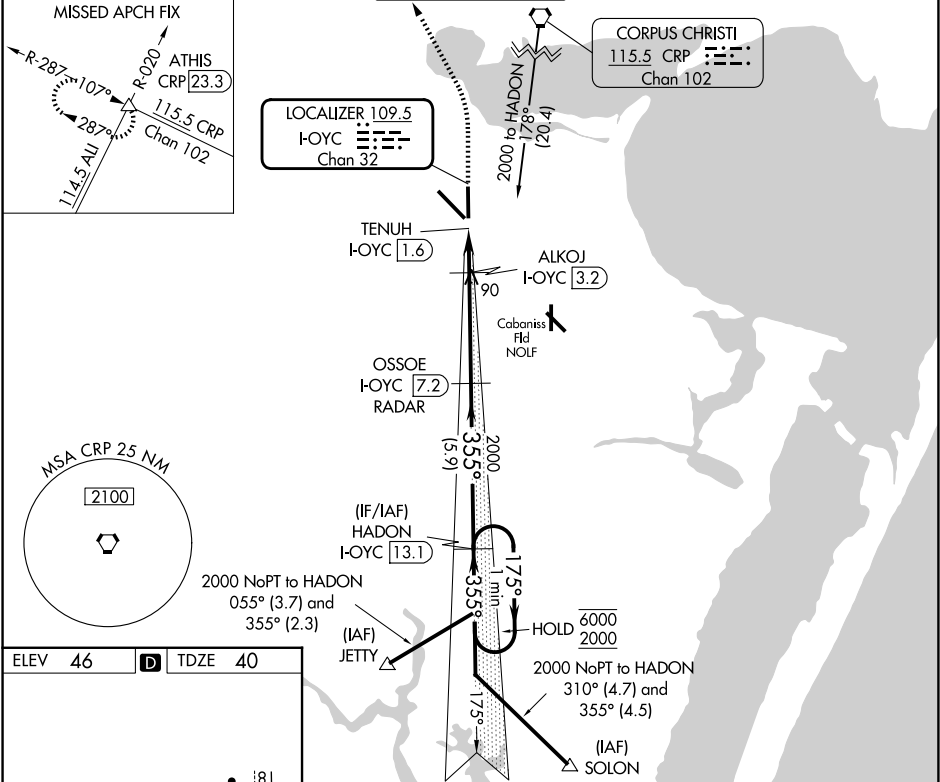

|          |                      |                      |                              |                                                      |                              |
|----------|----------------------|----------------------|------------------------------|------------------------------------------------------|------------------------------|
| 700      | 2000                 | CRP R-287            | ATHIS                        | ILS unusable inside DA. LOC unusable within 1.6 DME. |                              |
| hdg 338° |                      |                      |                              | OSSOE I-OYC 7.2 RADAR                                | HADON I-OYC 13.1             |
|          |                      |                      |                              | ALKOJ I-OYC 3.2                                      | TENUH I-OYC 1.6              |
|          |                      |                      |                              | 720                                                  | 2000                         |
|          |                      |                      |                              | 355°                                                 | 175° 6000 2000               |
|          |                      |                      |                              | 720                                                  | 2000                         |
|          |                      |                      |                              | 0.4                                                  | 1.6 NM 4 NM 5.9 NM           |
| CATEGORY | A                    | B                    | C                            | D                                                    | E                            |
| S-ILS 36 |                      | 240/24               | 200 (200-1/2)                |                                                      |                              |
| S-LOC 36 |                      | 340/24               | 300 (300-1/2)                |                                                      |                              |
| CIRCLING | 500-1<br>454 (500-1) | 780-1<br>734 (800-1) | 820-2 1/4<br>774 (800-2 1/4) | 820-2 1/2<br>774 (800-2 1/2)                         | 820-2 3/4<br>774 (800-2 3/4) |

SC-3, 30 OCT 2025 to 27 NOV 2025

SC-3, 30 OCT 2025 to 27 NOV 2025