

WAAS CH 97515 W13A	APP CRS 132°	Rwy Ldg TDZE Apt Elev	7510 46 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 13

CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C, D, and E visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct SOLON and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

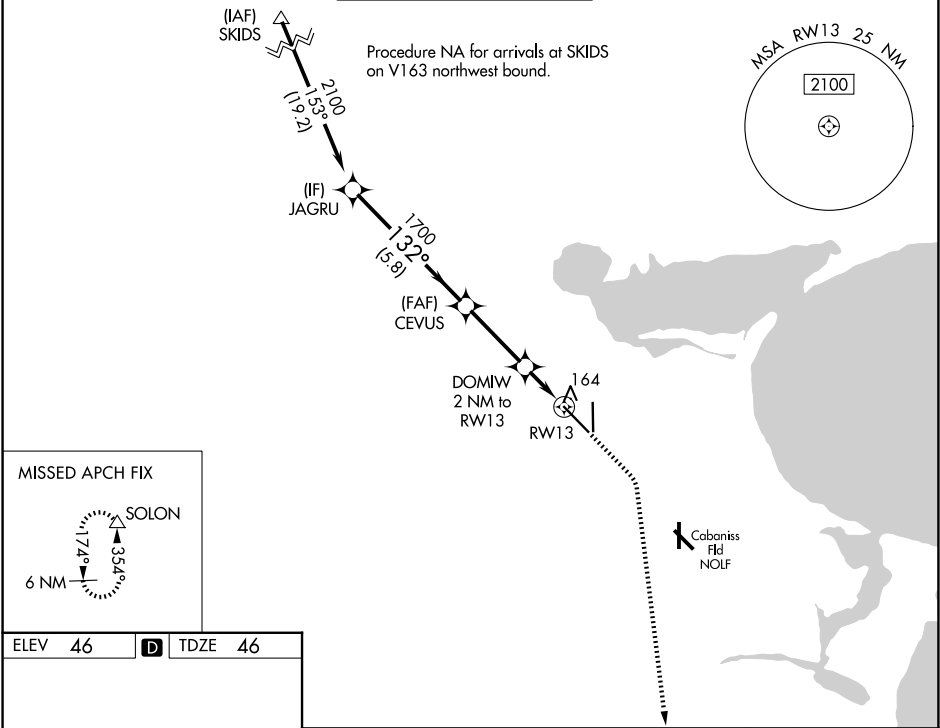

ELEV 46

D

TDZE 46

HIRL Rwy's 13-31 and 18-36

	JAGRU		CEVUS		DOMIW 2 NM to RW13		RW13	
	2100		1700		720		164	
	GP 3.00°		TCH 50					
	5.8 NM		3 NM		1 NM		1 NM	
CATEGORY	A		B		C		D	
LPV DA *	246/24		200 (200-½)					
LNAV/VNAV DA	325/24		279 (300-½)					
LNAV MDA	420/24		374 (400-½)		420/35		374 (400-¾)	
CIRCLING	500-1 454 (500-1)		780-1 734 (800-1)		820-2¼ 774 (800-2¼)		820-2½ 774 (800-2½)	
							820-2¾ 774 (800-2¾)	