

WAAS CH 40301 W35A	APP CRS 348°	Rwy Idg 8002 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 35
ACADIANA RGNL (ARA)

RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM and LNAV Cats C/D visibility to 1 SM. Circling NA to Rwy's 17W and 35W.

MALSr



MISSED APPROACH: Cimb to 440 then climbing right turn to 2000 direct LULEW and hold.

ASOS 133.325	LAFAYETTE APP CON ★ 121.1 268.7	ACADIANA TOWER ★ 125.0 (CTAF) 0 239.3	GND CON 121.7	CLNC DEL 121.7	CLNC DEL 118.05 (when twr closed)	UNICOM 122.95	122.7 0
-----------------	------------------------------------	--	------------------	-------------------	---	------------------	---------

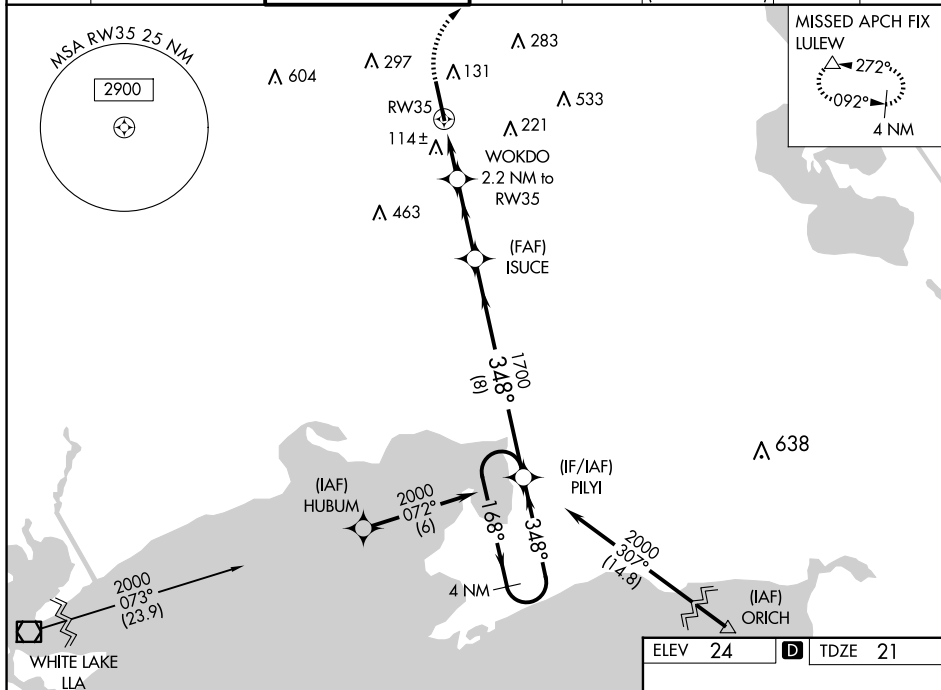

440 ↑ 2000 ↗ LULEW △ VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 52).	*LNAV only. WOKDO 2.2 NM to RW35 *1 NM to RW35 RW35 1 NM 1.2 NM 2.9 NM 8 NM ISUCE 1700 760* 1700 348° 168° 348° 2000 GP 3.00° TCH 52 4 NM Holding Pattern PILYI			
CATEGORY	A	B	C	D
LPV DA	221-1/2 200 (200-1/2)			
LNAV/VNAV DA	303-1/2 282 (300-1/2)			
LNAV MDA	380-1/2 359 (400-1/2)		380-3/4 359 (400-3/4)	
C CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1 1/2 576 (600-1 1/2)	680-2 656 (700-2)

