


WAAS CH 86511 W21A	APP CRS 211°	Rwy Idg 6028 TDZE 1110 Apt Elev 1110
--	------------------------	---

RNAV (GPS) RWY 21
STEVENS POINT MUNI (STE)

RNP APCH - GPS.  For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Inop table does not apply to LPV all Cats.  For inop ALS, increase LNAV Cat C and D visibility to 1 1/2 SM.		MALS 	MISSED APPROACH: Climb to 2800 direct FAYYE and hold.
AWOS-3 119.275	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.7 (CTAF) 	

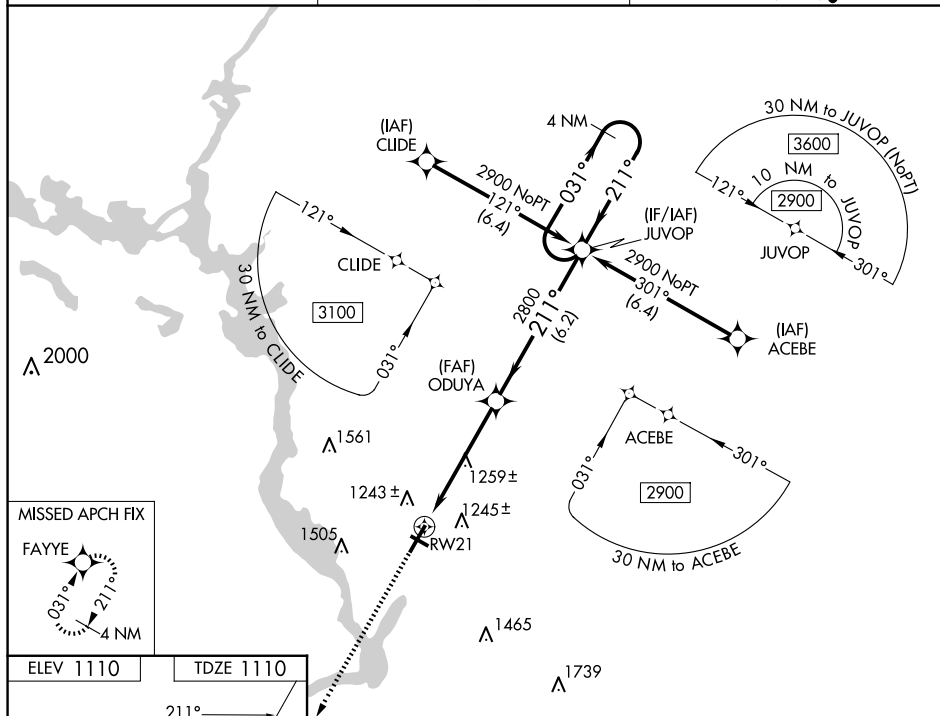

REIL Rwy 3 1165
HIRL Rws 3-21 and 12-30

3635 X 7.5

6038 X 120

12 21

30

2800

211°

2900

031°

211°

4 NM Holding Pattern

GP 3.00°
TCH 44

CATEGORY	A	B	C	D
LPV DA	1360-3/4	250 (300-3/4)		
LNAV/VNAV DA	1457-3/4	347 (400-3/4)		
LNAV MDA	1520-3/4 410 (500-3/4)	1520-1	410 (500-1)	
CIRCLING	1580-1 470 (500-1)	1600-1 490 (500-1)	1860-2 1/4 750 (800-2 1/4)	1860-2 1/2 750 (800-2 1/2)