WAAS CH 93511 W02A	APP CRS 023°	Rwy Ldg 6005 TDZE 433 Apt Elev 433

RNAV (GPS) RWY 2
JACKSON RGNL (MKL)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
For inop ALS, increase visibility LNAV Cats A/B to 1 SM, and Cats C/D to 1 3/8 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct GARTZ and hold.

ASOS	MEMPHIS CENTER	JACKSON TOWER ★	GND CON	UNICOM
119.325	134.65 316.15	127.15 (CTAF) L 249.95	120.9	122.95

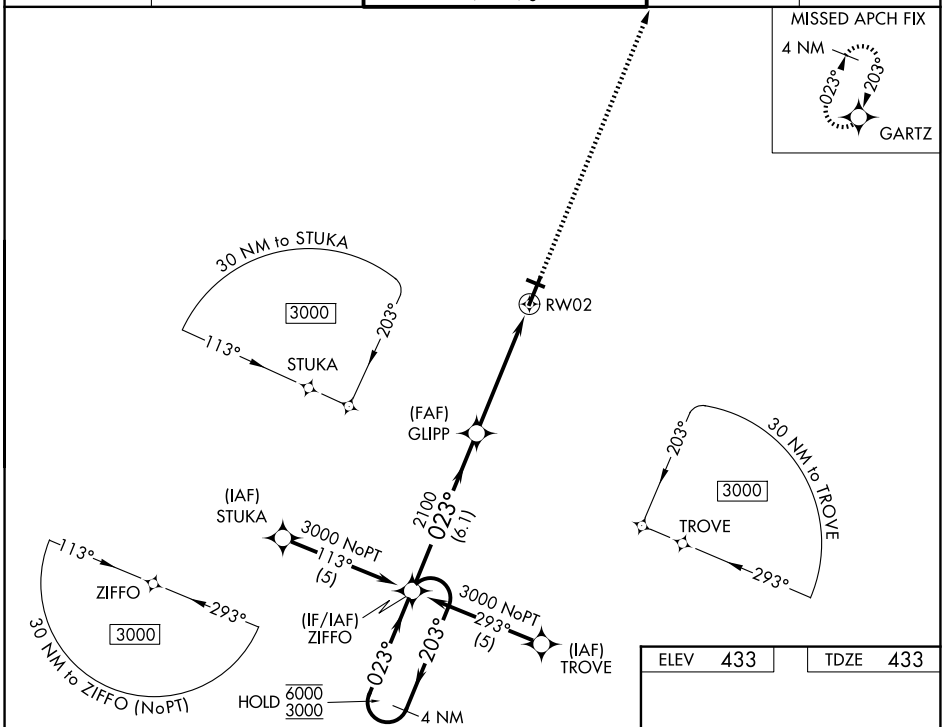

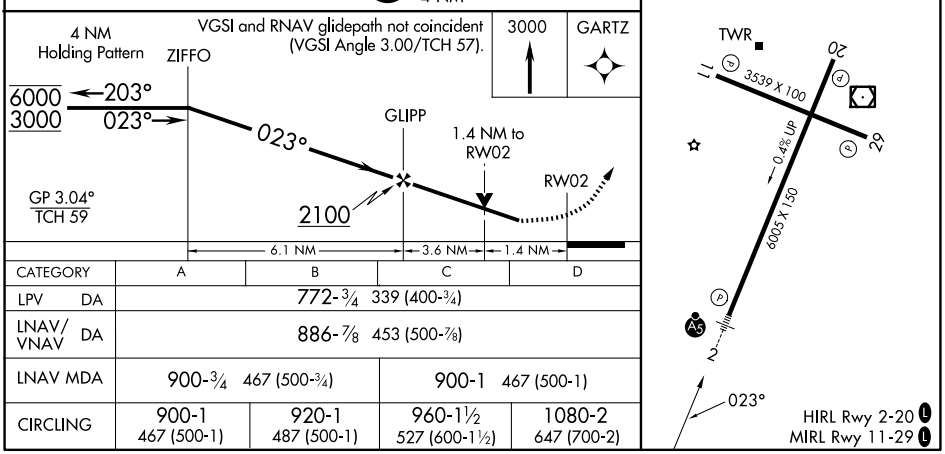

CATEGORY	A	B	C	D
LPV DA	772-3/4 339 (400-3/4)			
LNAV/VNAV DA	886-7/8 453 (500-7/8)			
LNAV MDA	900-3/4 467 (500-3/4)		900-1 467 (500-1)	
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1 1/2 527 (600-1 1/2)	1080-2 647 (700-2)

SE-1, 30 OCT 2025 to 27 NOV 2025
SE-1, 30 OCT 2025 to 27 NOV 2025