


WAAS CH 61041 W23A	APP CRS 229°	Rwy Ldg TDZE Apt Elev	5200 15 15
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 23

LAKE CHARLES RGNL (LCH)

RNP APCH - GPS.	MISSED APPROACH: Climb to 1700 direct WINUP and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA.	

ATIS 118.75	LAKE CHARLES APP CON★ 119.35 353.75	LAKE CHARLES TOWER★ 120.7 (CTAF) 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

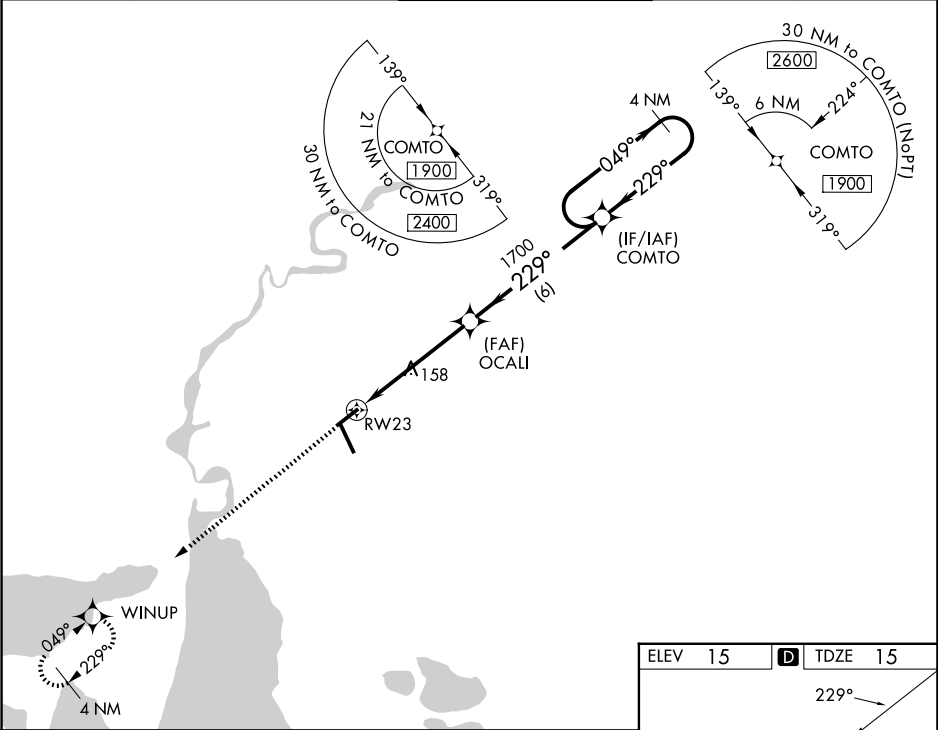

1700	WINUP	OCALI	COMTO	4 NM Holding Pattern
1.1 NM to RWY 23		1700	229°	049° → 1900
1.1	4 NM	6 NM		GP 3.00° TCH 47
CATEGORY	A	B	C	D
LPV DA	265-¾		250 (300-¾)	
LNAV/VNAV DA	301-⅞		286 (300-⅞)	
LNAV MDA	420-1 405 (500-1)		420-1½ 405 (500-1½)	
CIRCLING	440-1 425 (500-1)		580-1½ 665 (700-2)	

