

ILS or LOC RWY 1C
WASHINGTON DULLES INTL (IAD)

DME or RADAR required.
RADAR required for procedure entry at BRODY.

T Simultaneous approach authorized. DME from AML VOR/DME.
A DME use requires simultaneous reception of I-OSZ and AML DME.
 For inop ALS, increase S-LOC Cats C/D visibility to RVR 5500.

MISSED APPROACH: Climb to 4000 on AML VOR/DME R-010 to CHDMN/AML 16.9 DME/RADAR and hold, continue climb-in-hold to 4000.

DULLES TOWER		
120.1	317.8	(Rwy 1R/19L)
120.25	348.6	(Rwy 1C/19C)
134.425	348.6	(Rwys 1L/19R and 12/30)




GND CON
121.9 317.8 (EAST)
121.625 348.6 (WEST)

CLNC DEL
35.7 317.8

ARMEL
113.5 AML $\frac{1}{2} = \frac{1}{2}$
Chan 82
 $\Delta 1498$

LOCALIZER 111.3
I-OSZ $\begin{array}{ccc} \cdot & \cdot & \\ \cdot & \cdot & - \\ \cdot & \cdot & \cdot \end{array}$

CPDLC

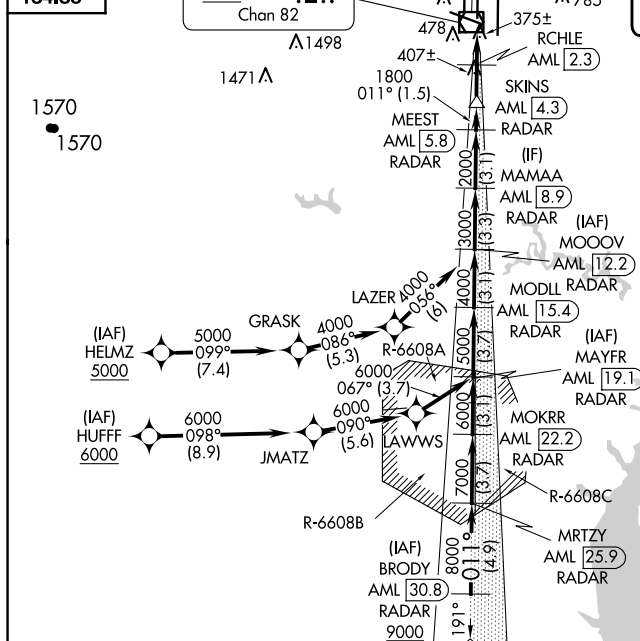

ELEV 312	D TDZE 286
TDZ/CL Rwy 1C, 1L 1R, 12, 19C and 19R REIL Rwy 30 HIRL all Rwy's	

