

LOC I-AID

110.1

APP CRS

298°

Rwy Idg

5320

TDZE

919

Apt Elev

919

ILS or LOC RWY 30

ANDERSON RGNL (AID)

ADF required.
RADAR required for procedure entry.


MALSF

MISSED APPROACH: Climb to 2200 then climbing right turn to 2900 direct VIDEO LOM/RADAR and hold.

▼ Rwy 30 helicopter visibility reduction below ¾ SM NA.

▲ For inop ALS, increase S-ILS 30 all Cats visibility to ¾ SM.

AWOS-3	INDIANAPOLIS APP CON	ANDERSON TOWER ★	GND CON	UNICOM
128.55	120.65 317.8	126.0 (CTAF) 0	121.6	122.95

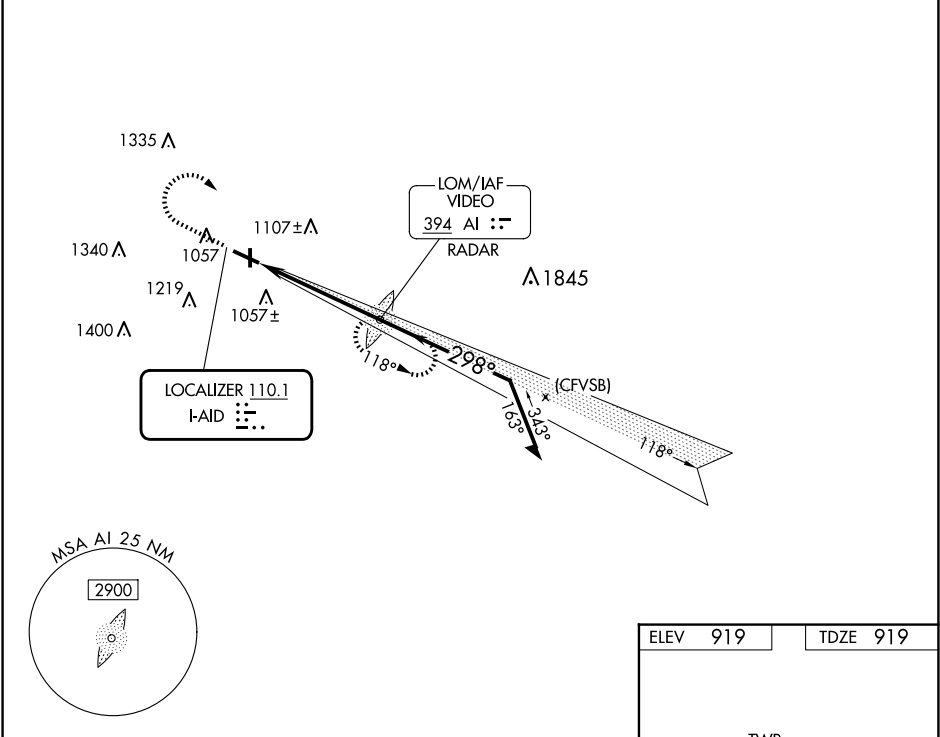

2200	2900	AI RADAR	AI LOM/RADAR	Remain within 10 NM	2520	118°	2900	298°	2700	GS 3.00° TCH 48
4.9 NM										
CATEGORY	A	B	C	D						
S-ILS 30	1209-¾ 290 (300-¾)									
S-LOC 30	1440-¾ 521 (600-¾)		1440-1¼ 521 (600-1¼)							
CIRCLING	1440-1 521 (600-1)		1520-1¾ 601 (700-1¾)		1520-2 601 (700-2)					

