

|         |       |         |          |      |
|---------|-------|---------|----------|------|
| LOC/DME | I-ALN | APP CRS | Rwy Ldg  | 8099 |
| 108.5   |       | 294°    | TDZE     | 531  |
| Chan 22 |       |         | Apt Elev | 544  |

ILS or LOC RWY 29

ST LOUIS RGNL (ALN)

⚠


For inop ALS, increase WULIB fix minimums S-LOC 29 Cats C/D visibility to 1 SM.

MALSR


MISSED APPROACH:

Climb to 1000 then climbing right turn to 2200 on heading 310° and on TOY VORTAC R-322 to TOPAZ INT/TOY 16 DME and hold.

|               |                                 |                                       |                  |                  |
|---------------|---------------------------------|---------------------------------------|------------------|------------------|
| ATIS<br>128.0 | ST LOUIS APP CON<br>124.2 353.9 | REGIONAL TOWER★<br>126.0 (CTAF) 239.0 | GND CON<br>120.2 | UNICOM<br>122.95 |
|---------------|---------------------------------|---------------------------------------|------------------|------------------|

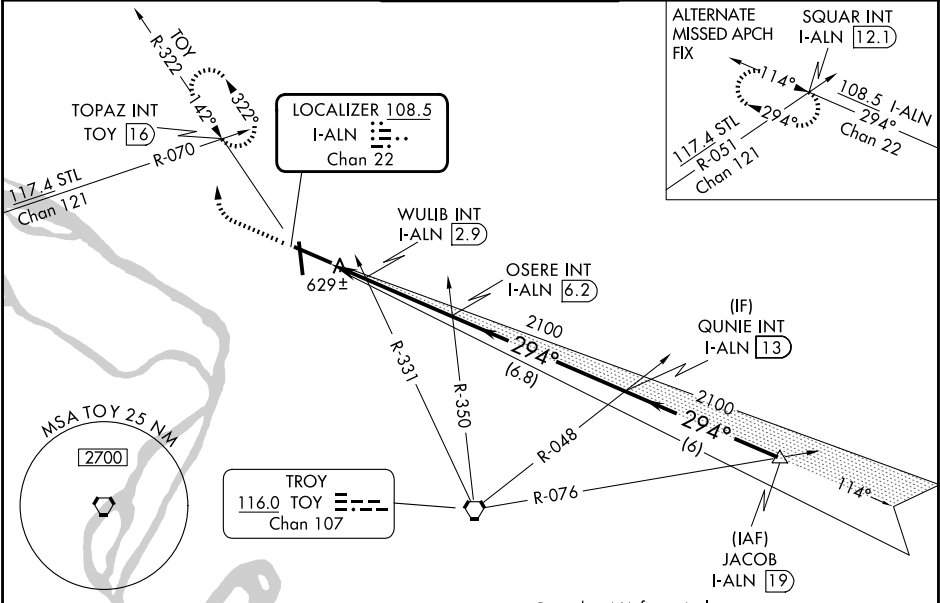

|          |   |          |
|----------|---|----------|
| ELEV 544 | D | TDZE 531 |
|----------|---|----------|

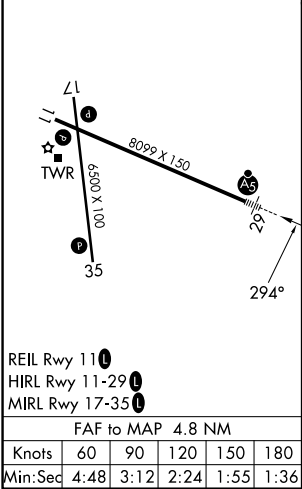

|                                                         |      |      |           |               |            |                     |                    |                |
|---------------------------------------------------------|------|------|-----------|---------------|------------|---------------------|--------------------|----------------|
|                                                         | 1000 | 2200 | TOY R-322 | TOPAZ INT     | *LOC only. |                     |                    |                |
|                                                         |      |      | hdg 310°  |               |            | OSERE INT I-ALN 6.2 | QUNIE INT I-ALN 13 | JACOB I-ALN 19 |
|                                                         |      |      |           |               |            | 2100                | 2100               | 2100           |
|                                                         |      |      |           |               |            | 294°                | 294°               | 294°           |
|                                                         |      |      |           |               |            | 1.4 NM              | 3.3 NM             | 6.8 NM         |
|                                                         |      |      |           |               |            | 2100                | 2100               | 2100           |
|                                                         |      |      |           |               |            | *980                |                    |                |
|                                                         |      |      |           |               |            | GS 3.00°            |                    | TCH 55         |
| CATEGORY                                                |      |      | A         | B             | C          | D                   |                    |                |
| S-ILS 29                                                |      |      | 731-1/2   | 200 (200-1/2) |            |                     |                    |                |
| S-LOC 29                                                |      |      | 980-1/2   | 449 (500-1/2) | 980-7/8    | 449 (500-7/8)       |                    |                |
| CIRCLING                                                |      |      | 1000-1    | 456 (500-1)   | 1160-13/4  | 616 (700-13/4)      | 1200-2             | 656 (700-2)    |
| WULIB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) |      |      |           |               |            |                     |                    |                |
| S-LOC 29                                                |      |      | 880-1/2   | 349 (400-1/2) | 880-5/8    | 349 (400-5/8)       |                    |                |
| CIRCLING                                                |      |      | 1000-1    | 456 (500-1)   | 1160-13/4  | 616 (700-13/4)      | 1200-2             | 656 (700-2)    |