

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>70711</b><br><b>W34A</b> | APP CRS<br><b>340°</b> | Rwy Ldg <b>7100</b><br>TDZE <b>1232</b><br>Apt Elev <b>1232</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 34

BRainerd Lakes RGNL (BRD)

RNP APCH - GPS.

▼


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using AIT altimeter setting. When local altimeter setting not received, use AIT altimeter setting and increase LPV DA to 1484 feet; increase LNAV/VNAV DA to 1578 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM. For inop ALS when using AIT altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.

MALSR

MISSED APPROACH: Climb to 3300 direct KRINK and on 294° track to CUCAC and hold.

|                        |                                           |                               |
|------------------------|-------------------------------------------|-------------------------------|
| ASOS<br><b>126.775</b> | MINNEAPOLIS CENTER<br><b>118.05 239.0</b> | UNICOM<br><b>122.7</b> (CTAF) |
|------------------------|-------------------------------------------|-------------------------------|

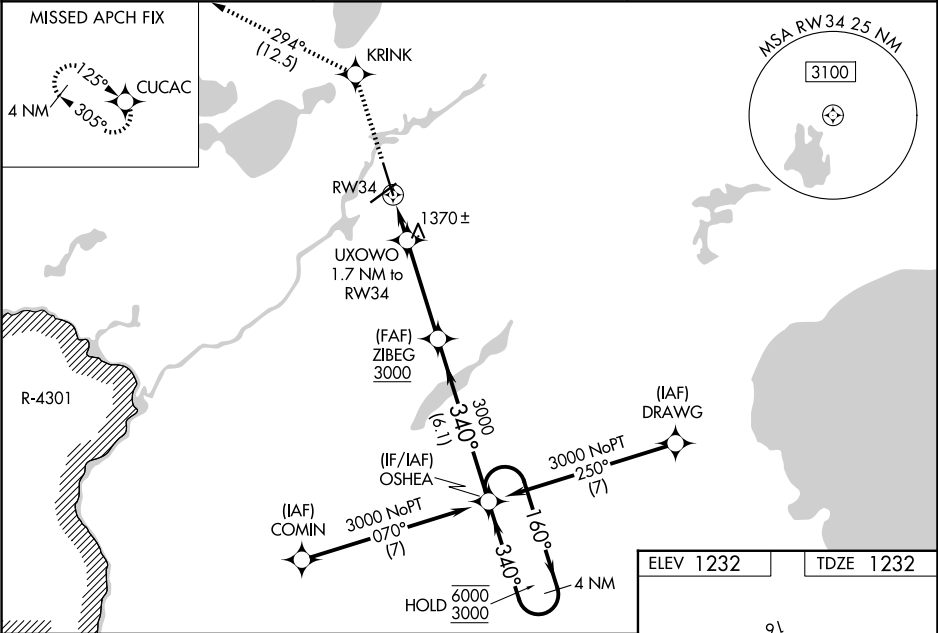

|                      |                    |                |                      |        |                    |                      |
|----------------------|--------------------|----------------|----------------------|--------|--------------------|----------------------|
| 3300                 | KRINK              | tr 294°        | CUCAC                | ZIBEG  | OSHEA              | 4 NM Holding Pattern |
| UXOWO 1.7 NM to RW34 |                    | 1.1 NM to RW34 |                      | 3000   | 340°               | 160° → 6000          |
| RW34                 |                    | RW34           |                      | 1820   | ← 340°             | ← 340° 3000          |
| 1.1 NM               |                    | 0.6 NM         |                      | 3.7 NM |                    | 6.1 NM               |
| CATEGORY             | A                  | B              | C                    | D      |                    |                      |
| LPV DA               | 1432-½             |                | 200 (200-½)          |        |                    |                      |
| LNAV/VNAV DA         | 1526-½             |                | 294 (300-½)          |        |                    |                      |
| LNAV MDA             | 1620-½ 388 (400-½) |                | 1620-⅝ 388 (400-⅝)   |        |                    |                      |
| CIRCLING             | 1760-1 528 (600-1) |                | 1760-1½ 528 (600-1½) |        | 1840-2 608 (700-2) |                      |

