

LOC/DME I-GKY 111.55 Chan 52 (Y)	APP CRS 342°	Rwy Ldg TDZE Apt Elev 6080 620 628
--	------------------------	--


ILS or LOC/DME RWY 34
ARLINGTON MUNI (GKY)

When local altimeter setting not received, use Grand Prairie Muni altimeter setting. Inop table does not apply to S-ILS 34.
For inop MALSR increase S-LOC 34 Cat A, B visibility to 1 mile.



MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 via heading 245° and TTT VOR/DME R-206 to TILLA INT/TTT 37 DME and hold.

ASOS 127.375	LONE STAR APP CON 135.975 379.9	ARLINGTON TOWER ★ 128.625 (CTAF)	GND CON 121.875	CLNC DEL 121.875	CLNC DEL 118.85 (When twr closed)
------------------------	---	--	---------------------------	----------------------------	--





RADAR REQUIRED

LOCALIZER 111.55
I-GKY
Chan 52(Y)


MYKES
I-GKY [5.4]
RADAR

(IF)
ESIKE
I-GKY [11.4]
RADAR

(IAF)
WIKEB
I-GKY [16.4]
RADAR



ELEV 628	TDZE 620
-----------------	-----------------

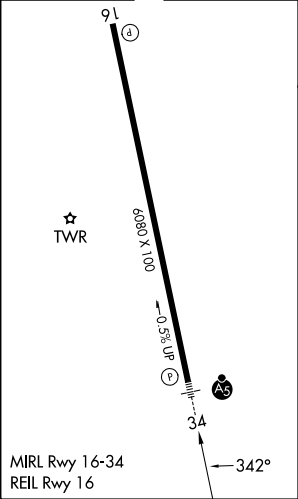

1100
3000
TTT R-206
TILLA
VGSi and ILS glidepath not coincident (VGSi Angle 3.00°/TCH 55).

*LOC only.

*I-GKY
I-GKY [1.1]
I-GKY [2.4]

MYKES
I-GKY [5.4]
RADAR

ESIKE
I-GKY [11.4]
RADAR

2300

GS 3.00°
TCH 60

CATEGORY	A	B	C	D
S-ILS 34	820-3/4	200 (200-3/4)		NA
S-LOC 34	1060-3/4	440 (500-3/4)		NA
CIRCLING	1100-1 472 (500-1)	1140-1 512 (600-1)	1220-1 1/2 592 (600-1 1/2)	NA