

NDB AIK	APP CRS	Rwy Ldg	5500
347	225°	TDZE	515
		Apt Elev	529

NDB RWY 25
AIKEN RGNL (AIK)



NA

When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting and increase all MDAs 120 feet; increase S-25 Cats B/C/D and Circling Cat C visibility ¼ SM. For inop ODALS, increase S-25 Cat C/D visibility to 1⅞ mile. For inop ODALS when using Augusta Rgnl at Bush Fld altimeter setting, increase S-25 Cat C/D visibility to 2½ mile. Helicopter visibility reduction below ¾ SM NA.


ODALS

MISSED APPROACH: Climbing right turn to 2200 in AIK NDB holding pattern.

AWOS-3PT 118.025	AUGUSTA APP CON★ 119.15 284.625	UNICOM 122.8 (CTAF) 0
---------------------	------------------------------------	--------------------------

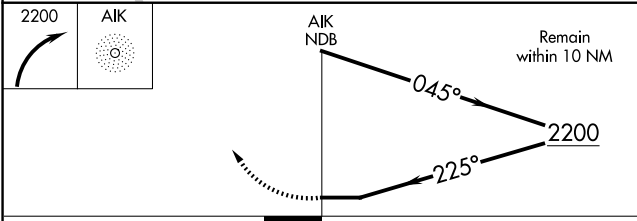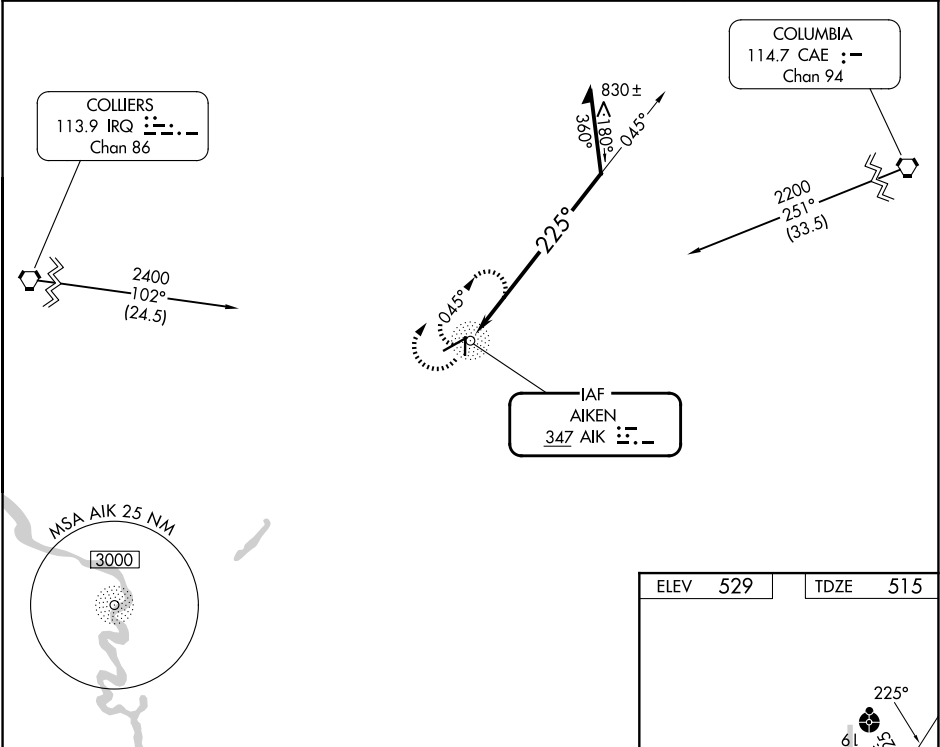

CATEGORY	A	B	C	D
S-25	1180-¾	665 (700-¾)	1180-1¾	665 (700-1¾)
CIRCLING	1180-1	651 (700-1)	1180-1¾	1420-3
			651 (700-1¾)	891 (900-3)

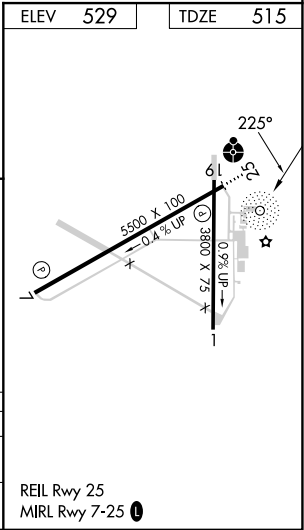

SE-2, 30 OCT 2025 to 27 NOV 2025

SE-2, 30 OCT 2025 to 27 NOV 2025