

WAAS CH 69311 W31A	APP CRS 313°	Rwy Ldg 6304 TDZE 1114 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 31
THIEF RIVER FALLS RGNL (TVF)


T Baro-VNAV and VDP NA when using Crockston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crockston altimeter setting; increase LPV DA to 1446 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1510 feet and all visibilities ¾ SM; increase all MDAs 100 feet and visibility Cats C and D ¼ SM. For inoperative MALS, increase LNAV Cats C/D visibility to 1½ mile. For inoperative MALS, when using Crockston altimeter setting, increase LPV all Cats visibility to 1½ mile, LNAV/VNAV all Cats visibility to 1¼ mile, LNAV Cats C/D visibility to 1½ mile.

MALSR




MISSED APPROACH:
Climb to 2700 direct
WIMUS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

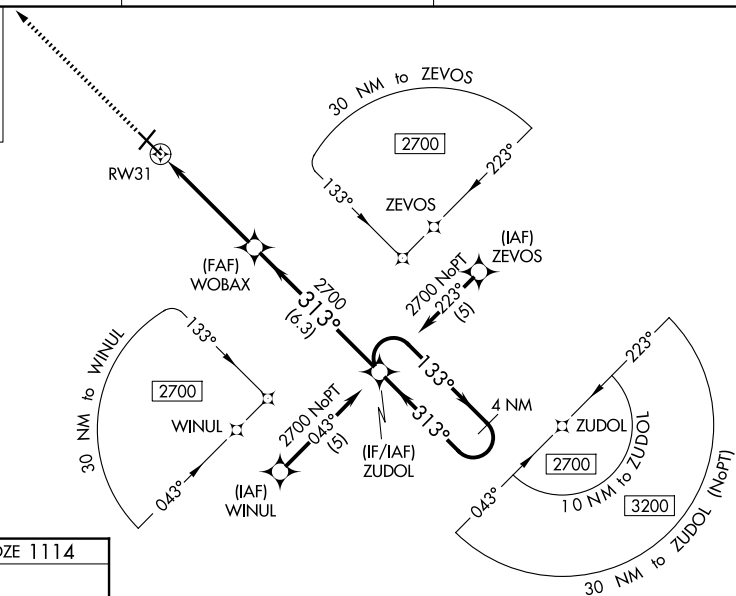

ELEV 1119	D	TDZE 1114
-----------	----------	-----------

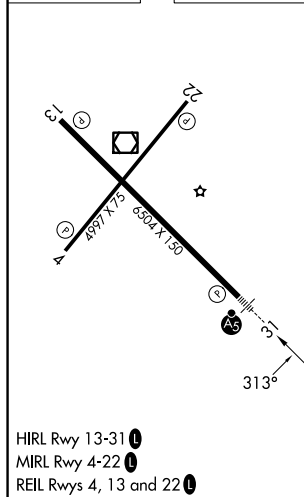

2700 ↑ WIMUS		WOBAX 2700		ZUDOL 4 NM Holding Pattern	
* LNAV only		* 1.3 NM to RW31			
		133° → 2700 ← 313° GP 3.00° TCH 55			
1.3 NM		3.5 NM		6.3 NM	
CATEGORY		A	B	C	D
LPV DA		1364-½ 250 (300-½)			
LNAV/VNAV DA		1428-½ 314 (400-½)			
LNAV MDA		1580-½ 466 (500-½)		1580-1 466 (500-1)	
CIRCLING		1580-1 461 (500-1)	1820-2 701 (800-2)	1980-2 ¾ 861 (900-2¾)	