

IRONWOOD, MICHIGAN

AL-5213 (FAA)


25163

LOC I-IWD <u>111.5</u>	APP CRS 270°	Rwy Ldg 6501 TDZE 1230 Apt Elev 1230
----------------------------------	------------------------	---

ILS or LOC RWY 27
GOGEBIC/IRON COUNTY (IWD)

 NA  -26°C	When local altimeter setting not received, use ASX altimeter setting: increase DA to 1562 feet; increase all MDAs 140 feet and S-LOC 27 visibility Cats C and D ½ SM and Circling visibility Cat B ¼ SM. For inop ALS when using ASX altimeter setting, increase S-ILS 27 all Cats visibility to 1 SM.	MALSR 	MISSED APPROACH: Climb to 3300 then right turn direct IWD VOR/DME and hold.
---	--	--	--

AWOS-3PT 125.175	MINNEAPOLIS CENTER 133.55	UNICOM 122.8 (CTAF) 0
----------------------------	-------------------------------------	---------------------------------

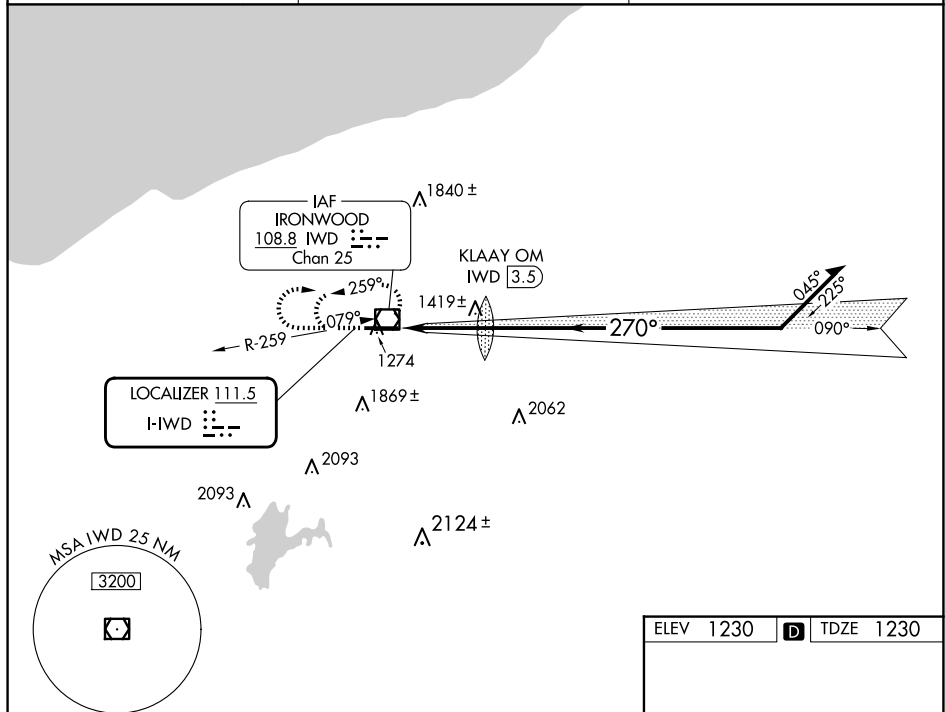

REIL Rwy 9 **9**

HIRL Rwy 9-27 **27**

FAF to MAP 3.2 NM

	Knots	60	90	120	150	180
Min:Sec	3:12	2:08	1:36	1:17	1:04	

[illegible]

IRONWOOD, MICHIGAN

Amdt 3D 26DEC24

46°32'N-90°08'W

GOGEBIC/IRON COUNTY (IWD)
ILS or LOC RWY 27

EC-1, 30 OCT 2025 to 27 NOV 2025