
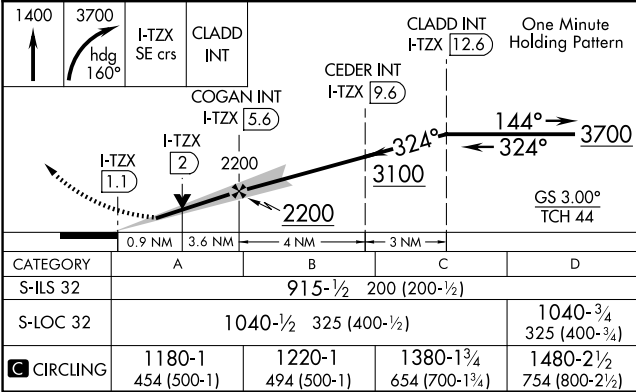


LOC/DME I-TZX	APP CRS	Rwy Idg	5498
109.55	324°	TDZE	715
Chan 32 (Y)		Apt Elev	726

ILS or LOC RWY 32

WINCHESTER RGNL (OKV)

NA Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Martinsburg altimeter setting and increase all DA 63 feet and all MDA 80 feet and Circling Cat C visibility ¼ mile. For inoperative MALSRL, increase S-LOC 32 Cat C visibility to 1 mile. For inoperative MALSRL when using Martinsburg altimeter setting, increase S-ILS 32 All Cats visibility ½ mile. VDP NA when using Martinsburg altimeter setting.	MALSRL A6	MISSED APPROACH: Climb to 1400 then climbing right turn to 3700 via heading 160° and I-TZX SE course to CLADD INT/I-TZX 12.6 DME and hold.	
AWOS-3 124.85	POTOMAC APP CON 120.45 306.925	CLNC DEL 126.15	UNICOM 122.975 (CTAF) 0

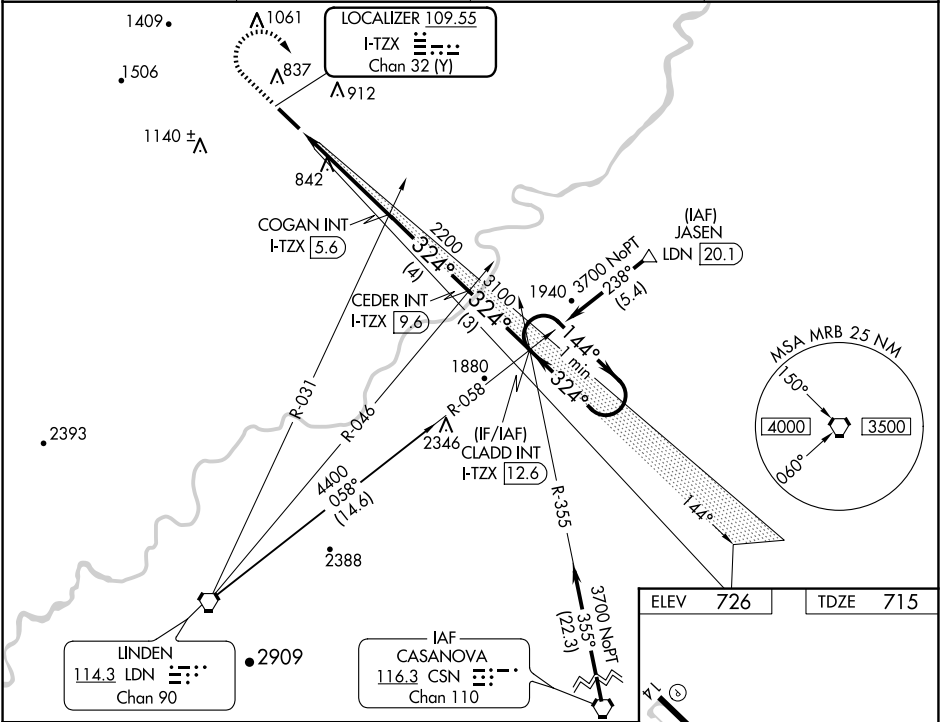

5498 X 100

0.5% UP

324°

REIL Rwy 14 **0**

HIRL Rwy 14-32 **0**

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30