

LOC/DME I-SFZ	APP CRS	Rwy Idg	5000
111.9	047°	TDZE	429
Chan 56		Apt Elev	441

LOC RWY 5

NORTH CENTRAL STATE (SF'Z)

▼

▲ NA

Circling Rwy 15, 33 NA at night. VDP NA with Providence altimeter setting. When local altimeter setting not received, use Providence altimeter setting and increase all MDA 100 feet; increase S-5 Cat C and Circling Cat C visibility ¼ mile, and ESULE fix minimums S-5 Cat C visibility ¼ mile.


MALS

≡

▲

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 on ORW VOR/DME R-057 to FOSTY INT/ ORW 23.5 DME and hold.

AWOS-3PT	PROVIDENCE APP CON ★	CINC DEL	UNICOM
120.775	123.675 244.875	124.35	123.075 (CTAF) 0

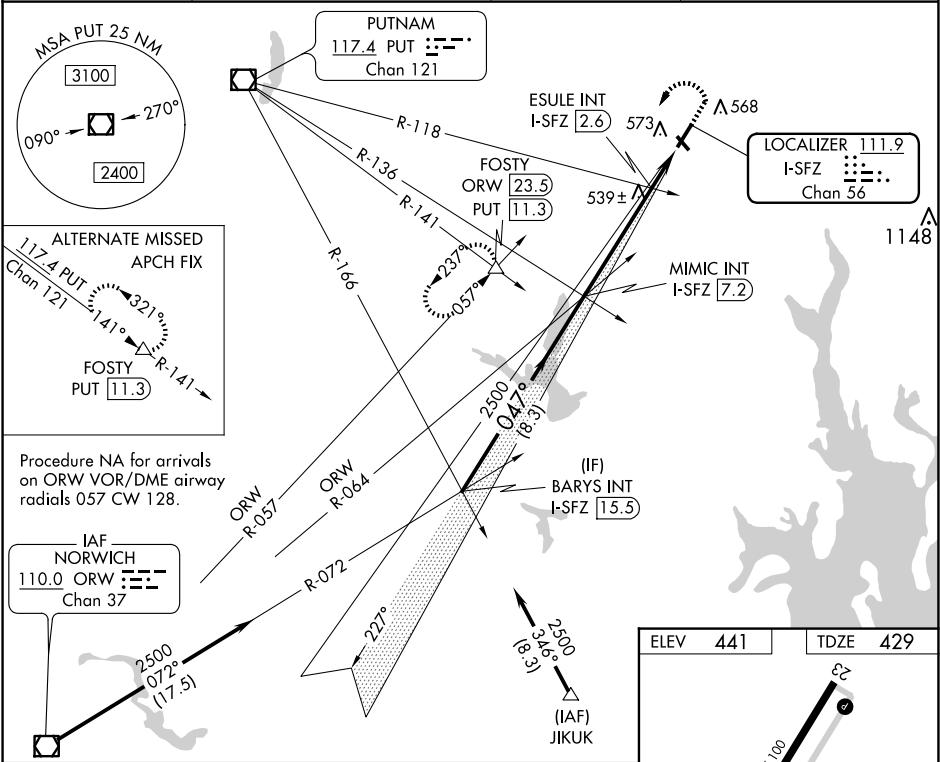

BARYS INT I-SFZ [15.5]		MIMIC INT I-SFZ [7.2]		ESULE INT I-SFZ [2.6]		ORW R-057		FOSTY △	
2500		2500		1000		2500			
047°		047°		3.00°		TCH 52			
*1140 when using Providence altimeter setting.		*1040							
8.3 NM		4.6 NM		0.8 NM		1 NM			
CATEGORY	A		B		C		D		
S-5	1040-¾ 611 (600-¾)		1040-1½ 611 (600-1½)		1040-1½ 611 (600-1½)		NA		
C CIRCLING	1040-1 599 (600-1)		1040-1¾ 599 (600-1¾)		1040-1¾ 599 (600-1¾)		NA		
ESULE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)									
S-5	800-¾ 371 (400-¾)		800-7⁄8 371 (400-7⁄8)		800-7⁄8 371 (400-7⁄8)		NA		
C CIRCLING	900-1 459 (500-1)		900-1½ 459 (500-1½)		900-1½ 459 (500-1½)		NA		

