
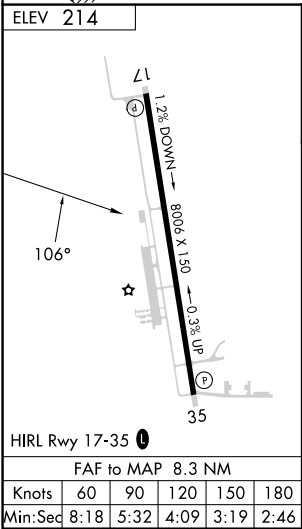


VORTAC CEW 115.9 Chan 106	APP CRS 106°	Rwy Idg TDZE Apt Elev N/A N/A 214
---	------------------------	---

VOR-A

BOB SIKES(CEW)

▼ ▲ Circling NA for Cat D west of Rwy 17-35. When local altimeter setting not received, use Eglin AFB altimeter setting and increase all MDA 60 feet and increase Circling Cat C/D visibility ¼ SM.	MISSED APPROACH: Climb to 1200 then climbing left turn to 2200 direct CEW VORTAC and hold.	
ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 123.075 (CTAF) 0

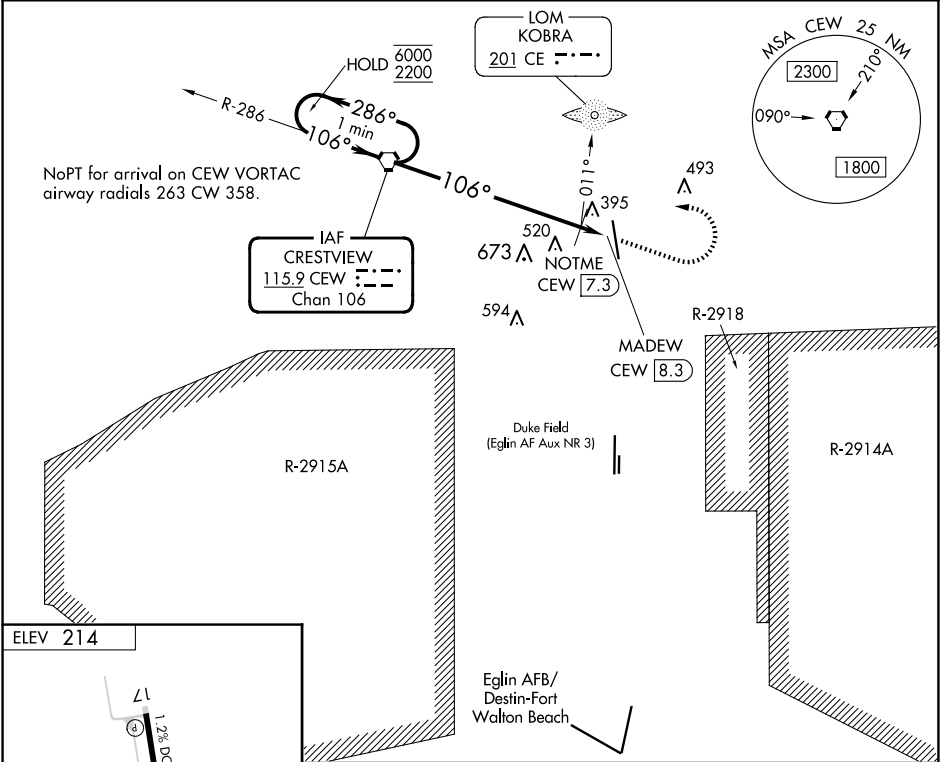

One Minute Holding Pattern		CEW VORTAC		1200 ↑	2200 ↷	CEW ⬡
6000 ←286° 2200 →106°		NOTME CEW 7.3 MADEW CEW 8.3 *900 7.3 NM 1 NM				
* 960 when using Eglin AFB altimeter setting.						
CATEGORY	A		B	C	D	
CIRCLING	900-1 686 (700-1)		900-2 686 (700-2)	900-2¼ 686 (700-2¼)		
NOTME FIX MINIMUMS (ADF OR DME REQUIRED)						
CIRCLING	700-1 486 (500-1)		820-1¾ 606 (700-1¾)	840-2 626 (700-2)		