

WAAS CH 63021 W23A	APP CRS 229°	Rwy Ldg TDZE Apt Elev 5047 775 775
--	------------------------	--

RNAV (GPS) RWY 23

GREATER CUMBERLAND RGNL (CBE)

⚠

⚠


⚠

-14°C

Circling NA NW of Rwy 5-23. Baro-VNAV and VDP NA when using Winchester altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Winchester altimeter setting and increase all DAs/MDAs 100 feet; increase all LPV visibilities ¼ SM. Rwy 5, 29 helicopter visibility reduction below 1 SM NA. Circling Rwy 5, 29 NA at night. # Missed approach requires minimum climb of 424 feet per NM to 1950.

MISSED APPROACH: Climb to 1220 then climbing left turn to 5000 direct KEYER and hold, continue climb-in-hold to 5000.

AWOS-3 128.625	JOHNSTOWN APP CON ★ 121.2 299.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

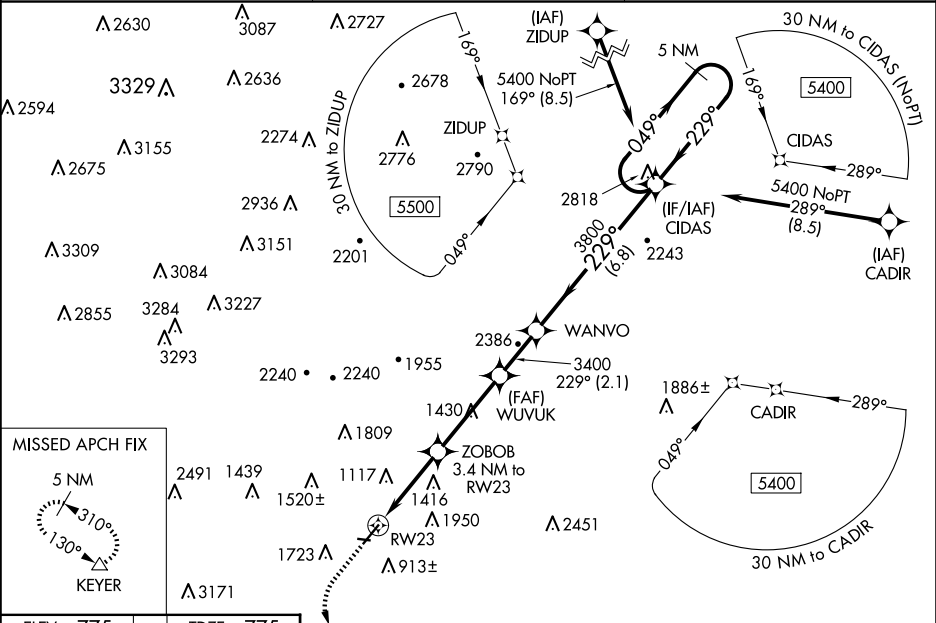

ELEV 775 TDZE 775

1220 5000 KEYER

VGSI and RNAV glidepath not coincident (VGSI Angle 3.59/TCH 29).

5 NM Holding Pattern

*LNAV only.

ZOBOB 3.4 NM to RW23

WUVUK 3400

WANVO

CIDAS

5400

049°

229°

3800

GP 3.50° TCH 55

2.6 NM 0.8 NM 3.5 NM 2.1 NM 6.8 NM

REIL Rwy 23 0

LURL Rwy 11-29 0

HIRL Rwy 5-23 0

CATEGORY	A	B	C	D
#LPV DA	NA	NA	1088-7/8 313 (400-7/8)	NA
LPV DA	1025-3/4 250 (300-3/4)	2140-1/2 1365 (1400-1/2)	2168-5 1393 (1400-5)	NA
LNAV/VNAV DA	1930-4 1155 (1200-4)	NA	NA	NA
LNAV MDA	1780-1 1/4 1005 (1100-1 1/4)	1780-1 1/2 1005 (1100-1 1/2)	1780-3 1005 (1100-3)	NA
CIRCLING	1780-1 1/4 1005 (1100-1 1/4)	2140-1 1/2 1365 (1400-1 1/2)	2260-3 1485 (1500-3)	NA