

WAAS
CH **58039**
W11A

APP CRS
106°

Rwy Idg
TDZE
Apt Elev
5502
1400
1419


RNAV (GPS) RWY 11

INDIANA COUNTY/JIMMY STEWART FLD (IDI)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
⚠ Baro-VNAV and VDP NA when using Allegheny County altimeter setting. DME/DME RNP-0.3 NA. Rwy 11 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Allegheny County altimeter setting and increase LPV DA to 2026 feet and LNAV/VNAV DA to 2156 feet; increase visibility LPV all Cats to 2 ½ SM and LNAV/VNAV all Cats to 3 SM. Increase all MDA 120 feet and all Cat A and B visibility to 1 ¼ SM and LNAV Cat C and D visibility to 2 ½ SM.

MISSED APPROACH:
Climb to 4800 direct UHGUS and hold.

AWOS-3 126.625	JOHNSTOWN APP CON ★ 121.2 299.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

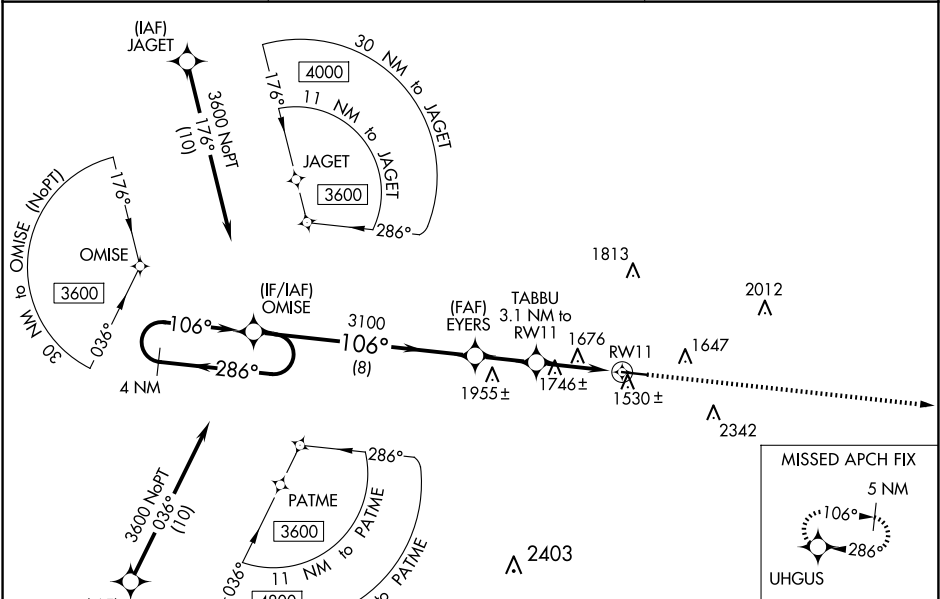

ELEV 1419		TDZE 1400	
4 NM Holding Pattern		UHGUS	
3600 ← 286° → 106°		* 2380	
GP 3.00° TCH 42		* 2 NM to RW11	
OMISE		RW11	
EYERS		TABBU 3.1 NM to RW11	
3100		* 2 NM to RW11	
8 NM		1.1 NM	
2.2 NM		2 NM	
CATEGORY	A	B	C
LPV DA	1907-1¾		507 (500-1¾)
LNAV/VNAV DA	2037-2½		637 (700-2½)
LNAV MDA	2060-1	660 (700-1)	2060-1⅞ 660 (700-1⅞)
CIRCLING	2120-1 701 (800-1)	2180-1 761 (800-1)	2660-3 1241 (1300-3)
REIL Rwy 11 0		HIRL Rwy 11-29 0	