
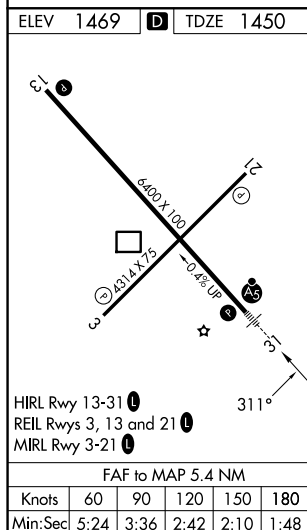



LOC 1-VKE <u>108.7</u>	APP CRS 311°	Rwy Ldg 6400 TDZE 1450 Apt Elev 1469
----------------------------------	------------------------	---

ILS or LOC RWY 31
DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.		
DME or RADAR required.		
 VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase S-ILS 31 DA to 1711 feet; increase all MDAs 80 feet and S-LOC 31 visibility Cat C/D 1/2 SM, and Circling visibility Cat C/D 1/4 SM. DME from DVL DME. DME use requires simultaneous reception of I-VKE and DVL DME. For inop ALS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to 1/2 SM. For inop ALS, increase S-LOC 31 Cat C/D visibility to 1/2 SM.	 MALSR  AS	MISSED APPROACH: Climb to 3400 direct KRAMR and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

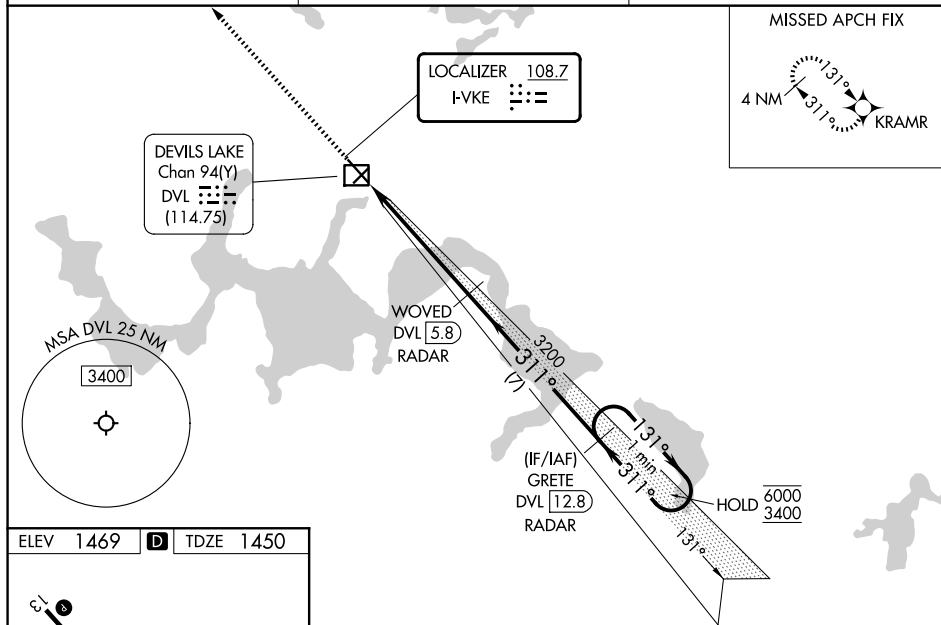

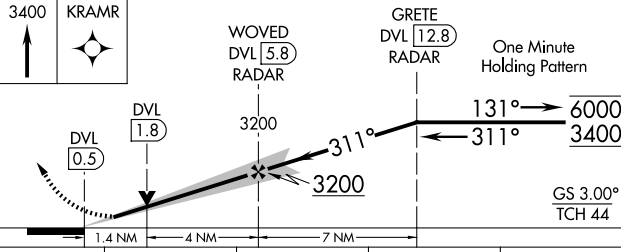3400 ↑	KRAMR 				
CATEGORY	A	B	C	D	
S-ILS 31	1650-½ 200 (200-½)				
S-LOC 31	1920-½ 470 (500-½)		1920-1 470 (500-1)		
CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼)	2240-2½ 771 (800-2½)	