

WAAS CH 78314 W13A	APP CRS 131°	Rwy Ldg 6400 TDZE 1470 Apt Elev 1470
--	------------------------	---


RNAV (GPS) RWY 13

DEVILS LAKE RGNL (DVL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all. Cats visibility ¼ mile, LNAV and Circling Cats C and D visibility ½ mile.

MISSED APPROACH: Climb to 3400 direct GRETE and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) ①
----------------------------	--	---------------------------------

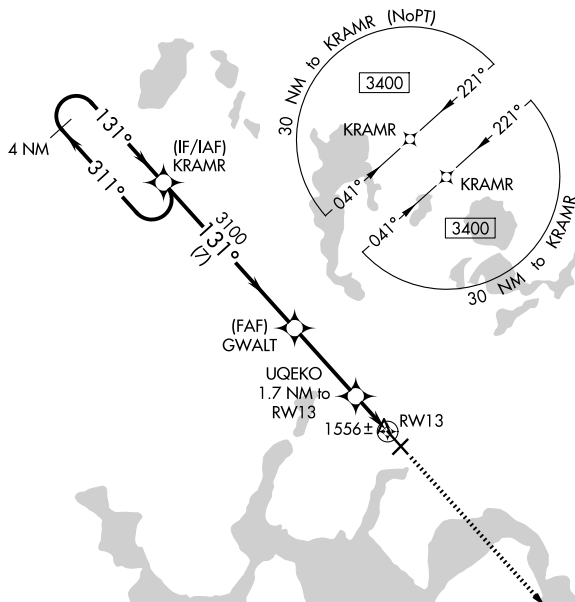

MISSED APCH FIX

GRETE

31°

4 NM

4 NM Holding Pattern

3400

GP 3.00° TCH 50

KRAMR

GWALT

3100

311°

131°

171°

3100

*2060

7 NM

3.3 NM

0.8 NM

0.9 NM

UQEKO 1.7 NM to RW13

*0.9 NM to RW13

RW13

3400

GRETE

*RNAV only.

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 45).

CATEGORY	A	B	C	D
LPV DA	1720-3/4 250 (300-3/4)			
RNAV/VNAV DA	1791-1 321 (400-1)			
RNAV MDA	1820-1 350 (400-1)			
CIRCLING	2000-1	530 (600-1)	2240-2 1/4 770 (800-2 1/4)	2240-2 1/2 770 (800-2 1/2)

ELEV 1470

TDZE 1470

131°

6400 X 100

AS14 X 75

0.4° UP

AS5

AS6

AS7

HIRL Rwy 13-31

REIL Rwys 3, 13, and 21

MIRL Rwy 3-21