

WAAS
CH **72717**
W01A

APP CRS
014°

Rwy Ldg
TDZE **956**
Apt Elev **956**

5701

956

956

RNAV (GPS) RWY 1

AMES MUNI (AMW)

RNP APCH.

▼

✱


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). For inop MALSR, increase LNAV Cats A, B visibility to 1 mile.

MALSR

AS

MISSED APPROACH: Climb to 3000 direct FULLE and hold.

ASOS 132.025	DES MOINES APP CON 123.9 307.15	CLNC DEL 126.0	UNICOM 122.7 (CTAF) 0
------------------------	---	--------------------------	--

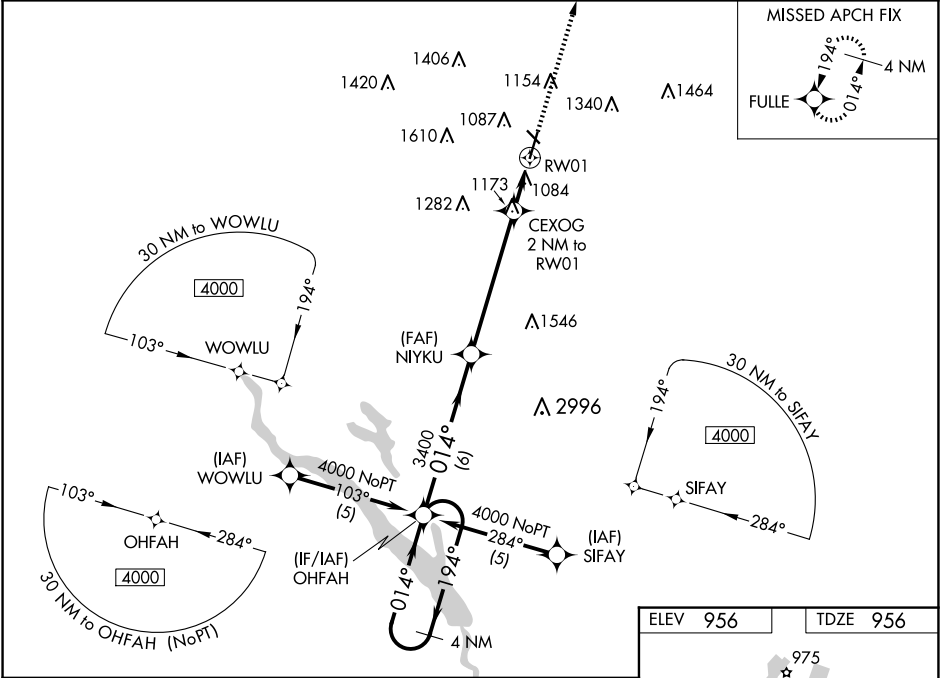

4 NM Holding Pattern		OHFAH	NIYKU	CEXOG 2 NM to RW01	3000 FULLE
4000 ← 194°		014° →	014°	3400	*1.4 NM to RW01
GP 3.00°					*1640
TCH 50					
		6 NM	5.4 NM	0.6 NM	1.4 NM
CATEGORY	A	B	C	D	
LPV DA	1261-3/4	305 (400-3/4)		NA	
LNAV/VNAV DA	1364-1	408 (500-1)		NA	
LNAV MDA	1440-3/4	484 (500-3/4)		NA	
CIRCLING	1440-1 484 (500-1)	1460-1 504 (600-1)	1640-2 684 (700-2)	NA	

