


APP CRS	Rwy Ldg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R
ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS				MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.		
When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase RNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.						
ATIS	ST LOUIS APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
121.45	123.7 371.875	119.925 (CTAF) 0 379.3	121.8	118.275	121.8 (When twr closed)	122.95

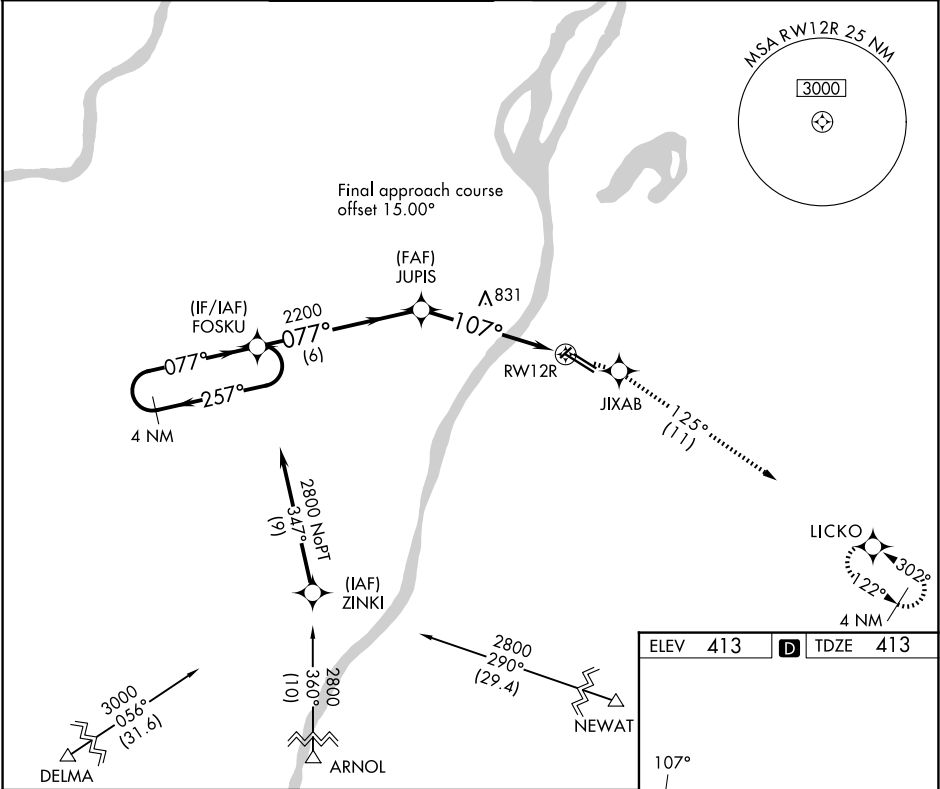

4 NM Holding Pattern		FOSKU	2200	JIXAB	LICKO
2800 ← 257°		077° →	077°	tr 125°	
VDP NA when using St Louis Lambert Intl altimeter setting.		JUPIS	2.1 NM to RW12R	RW12R	
		2200	3.03°	TCH 50	
		6 NM	3.3 NM	2.1 NM	
CATEGORY	A	B	C	D	
RNAV MDA	1140-1	727 (800-1)	1140-2	1140-2¼	
			727 (800-2)	727 (800-2¼)	
CIRCLING	1140-1	727 (800-1)	1240-2½	1380-3	
			827 (900-2½)	967 (1000-3)	

HIRL Rwy 12R-30L

REIL Rwys 12L and 12R

REIL Rwy 30R

MIRL Rwys 5-23 and 12L-30R

EC-3, 30 OCT 2025 to 27 NOV 2025

EC-3, 30 OCT 2025 to 27 NOV 2025