


**TOP ALTITUDE:
ASSIGNED BY ATC**

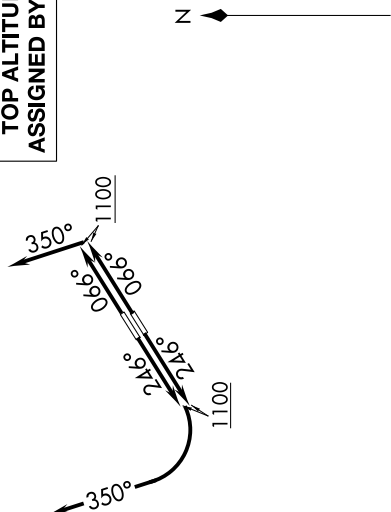


NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: BAGEL TRANSITION: For aircraft landing MDW only, or as assigned by ATC.
NOTE: DAIFE TRANSITION: For aircraft landing ORD only, or as assigned by ATC.

TAKEOFF MINIMUMS:

Rwys 6L/R, 24R: Standard with a minimum climb of 500' per NM to 1100.
Rwy 24L: 400-1% or standard with a minimum climb of 757' per NM to 1000.

ATIS
125.25
CLINC DEL
339.8
121.9 (when tower closed)
GND CON
121.9 339.8
LAKEFRONT TOWER ★
124.3 (CTAF) 339.8
CLEVELAND DEP CON
125.35 346.325

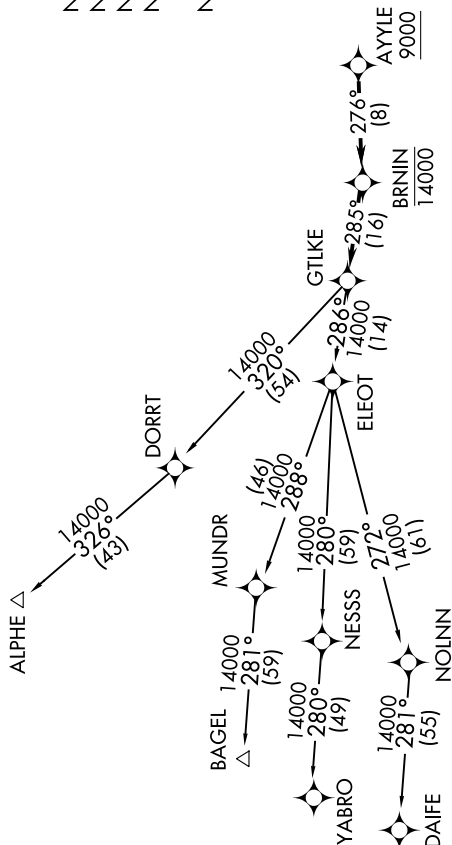

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)