

WAAS
CH **93620**
W12A

APP CRS
123°

Rwy Idg
TDZE **2294**
Apt Elev **2296**

RNAV (GPS) RWY 12


WOKAL FLD/GLASGOW-VALLEY COUNTY (GGW)

RNP APCH

For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -14°C or above 54°C. When local altimeter setting not received, use Wolf Point altimeter setting and increase LPV DA to 2685 feet and visibility all Cats ½ SM; Increase LNAV/VNAV DA to 2728 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV Cats C/D and Circling Cat D visibility ½ SM, Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Wolf Point altimeter setting.

MISSED APPROACH:
Climb to 6000 direct
EZCUP and on track
077° to NEGAE
and hold.

ASOS 135.175	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

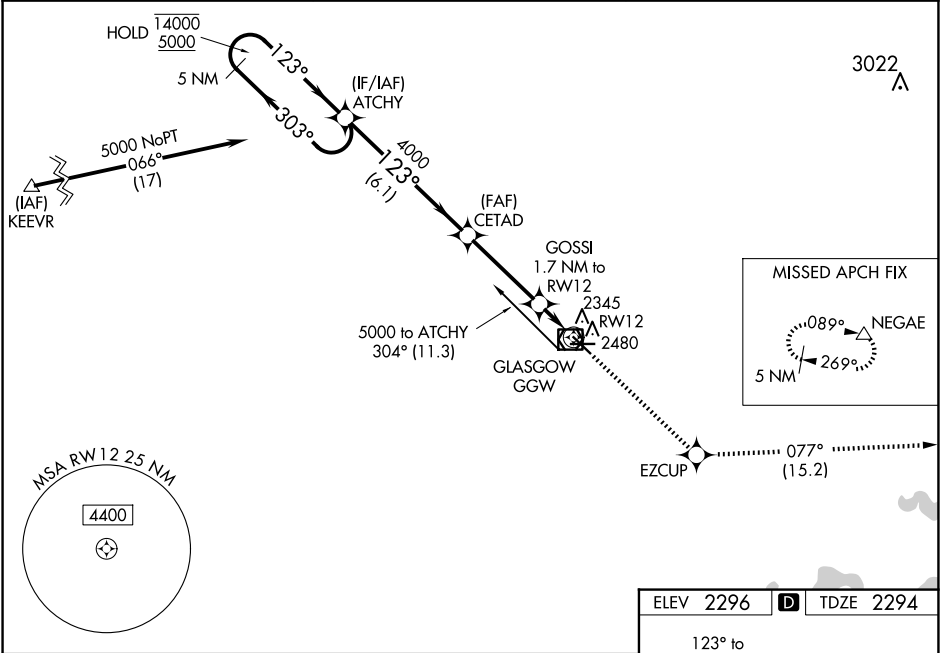

5 NM Holding Pattern

ATCHY

14000 ← 303°
5000 → 123°

GP 3.00°
TCH 40

CETAD

4000

GOSSI 1.7 NM to RW12

*2860

*0.9 NM to RW12

RW12

6.1 NM

3.5 NM

0.8

0.9

6000

EZCUP

tr 077°

NEGAE

*LNAV only

CATEGORY	A	B	C	D
LPV DA	2544-7/8	250 (300-7/8)		
LNAV/VNAV DA	2587-1	293 (300-1)		
LNAV MDA	2600-1	306 (400-1)	2600-7/8	306 (400-7/8)
CIRCLING	2780-1	484 (500-1)	2780-1½ 484 (500-1½)	2900-2 604 (700-2)

123° to RW12

5000 X 75

5002 X 100

2334

26

30

REIL Rwy 8, 12, 26 and 30 0
MIRL Rwy 8-26 and 12-30 0