

|                           |                        |                             |                                         |
|---------------------------|------------------------|-----------------------------|-----------------------------------------|
| LOC I-FZU<br><b>111.1</b> | APP CRS<br><b>259°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7005</b><br><b>462</b><br><b>463</b> |
|---------------------------|------------------------|-----------------------------|-----------------------------------------|

ILS or LOC RWY 26L


SPIRIT OF ST LOUIS (SUS)

⚠ When local alimeter setting not received, use St Louis Lambert Intl alimeter setting:  
increase S-ILS 26L DA to 705 feet; increase all MDAs 60 feet and S-LOC 26L visibility  
Cat C and D ½ SM and Circling visibility C ¼ SM. For inop ALS, increase S-LOC 26L Cats C  
and D visibility to 1½ SM. For inop ALS when using St Louis Lambert Intl alimeter setting,  
increase S-LOC 26L Cats C and D visibility to 2 SM. \*RVR 1800 authorized with use of FD  
or AP or HUD to DA (NA when using St Louis Lambert Intl alimeter setting).


MALSR


MISSED APPROACH:  
Climb to 2400 then  
right turn direct FTZ  
VORTAC and hold.

|                      |                                         |                                                      |                         |                          |                                                           |                         |
|----------------------|-----------------------------------------|------------------------------------------------------|-------------------------|--------------------------|-----------------------------------------------------------|-------------------------|
| ATIS<br><b>134.8</b> | ST. LOUIS APP CON<br><b>126.5 254.3</b> | SPIRIT TOWER*<br><b>124.75</b> (CTAF) <b>0 257.2</b> | GND CON<br><b>121.7</b> | CLNC DEL<br><b>133.1</b> | ST. LOUIS CLNC DEL<br><b>121.7</b><br>(when tower closed) | UNICOM<br><b>122.95</b> |
|----------------------|-----------------------------------------|------------------------------------------------------|-------------------------|--------------------------|-----------------------------------------------------------|-------------------------|

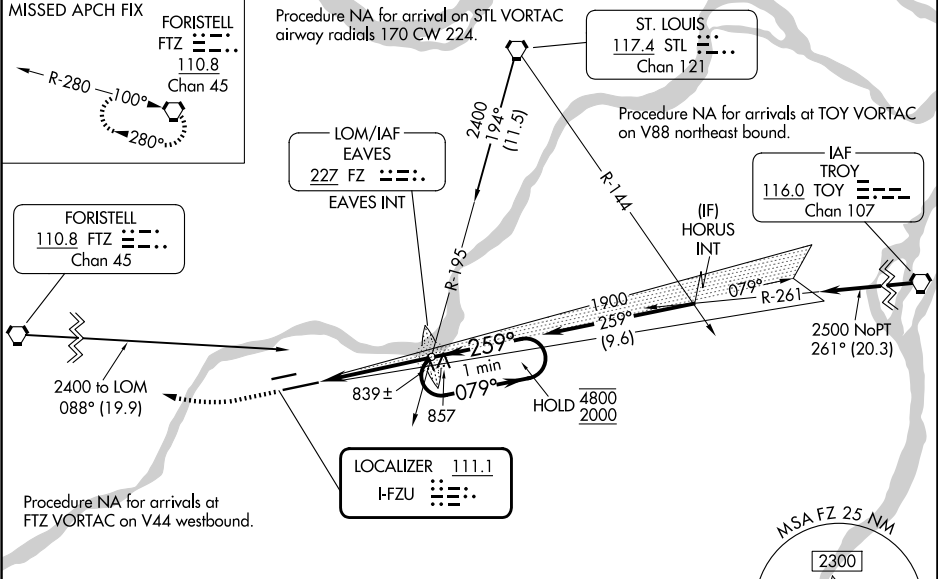

|          |          |          |
|----------|----------|----------|
| ELEV 463 | <b>D</b> | TDZE 462 |
|----------|----------|----------|

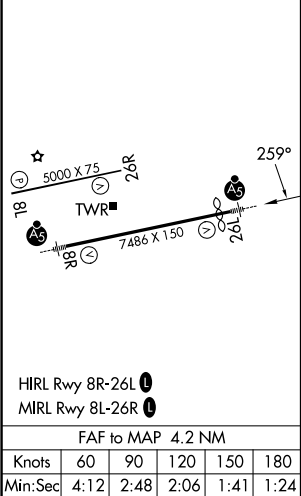
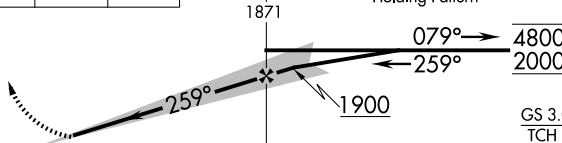
|                                                                                     |                                                                                     |                                                                                     |                                                                                            |                             |                               |                            |                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------|-------------------------------|----------------------------|-----------------------|
| 2400                                                                                |  |  | FTZ<br> | FZ LOM<br>EAVES INT<br>1871 | One Minute<br>Holding Pattern | 079° → 4800<br>← 259° 2000 | GS 3.00°<br>TCH 55    |
|  |                                                                                     |                                                                                     |                                                                                            |                             |                               |                            |                       |
| CATEGORY                                                                            | A                                                                                   |                                                                                     | B                                                                                          |                             | C                             |                            | D                     |
| S-ILS 26L *                                                                         | 662/24 200 (200-½)                                                                  |                                                                                     |                                                                                            |                             |                               |                            |                       |
| S-LOC 26L                                                                           | 1140/24 678 (700-½)                                                                 |                                                                                     |                                                                                            |                             | 1140-1½ 678 (700-1½)          |                            |                       |
| CIRCLING                                                                            | 1140-1 677 (700-1)                                                                  |                                                                                     |                                                                                            |                             | 1180-2<br>717 (800-2)         |                            | 1360-3<br>897 (900-3) |