

WAAS CH 61032 W30A	APP CRS 305°	Rwy Idg TDZE 1056 Apt Elev 1060
--	------------------------	---

RNAV (GPS) RWY 30



FARIBAULT MUNI-LIZ WALL STROHFUS FLD (F'BL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Owatonna altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV Cat C visibility 1/8 mile. Baro-VNAV and VDP NA when using Owatonna altimeter setting. Circling NA to Rwy's 1 and 19.

MISSED APPROACH: Climb to 3000 direct FABAU and hold.

AWOS-3 120.2	MINNEAPOLIS APP CON 134.7 284.7	GCO 121.725	UNICOM 122.8 (CTAF) 0
------------------------	---	-----------------------	--

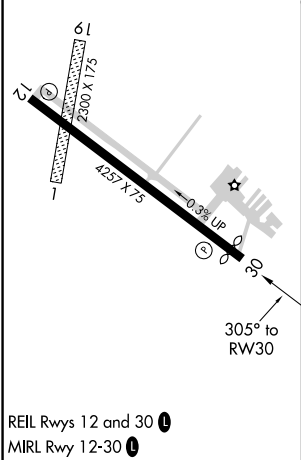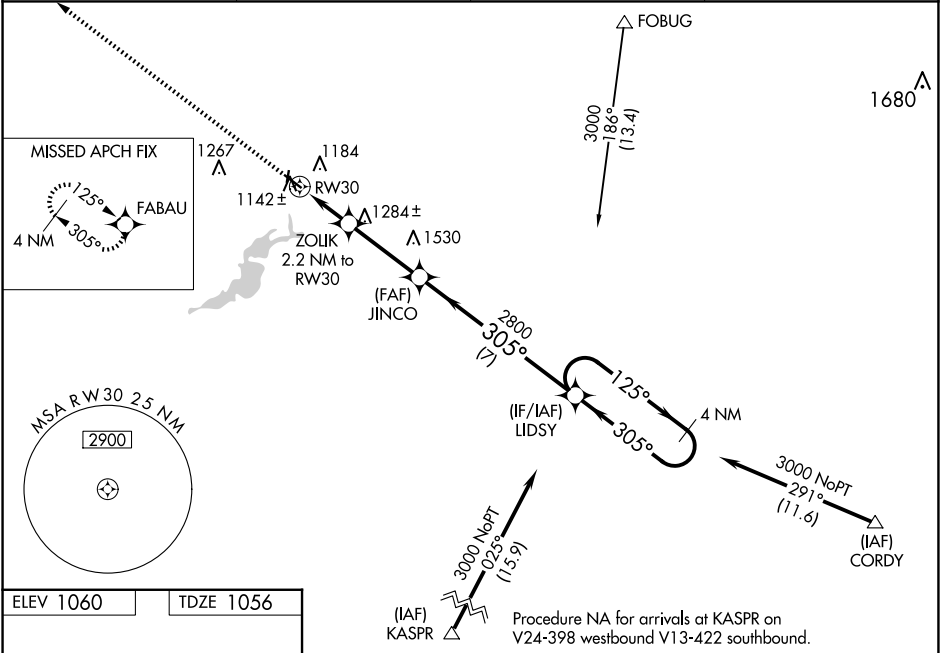

3000

FABAU




*LNAV only



1 NM

1.2

3.2 NM

7 NM

1780*

2800

2800

3000

RW30

ZOLIK

JINCO

LIDSY

2.2 NM to RW30

2800

2800

4 NM Holding Pattern

125° →

← 305°

GP 3.00°

TCH 40

CATEGORY

A

B

C

D

LPV DA

1306-1 250 (300-1)

NA

LNAV/VNAV DA

1306-1 250 (300-1)

NA

LNAV MDA

1400-1 344 (400-1)

NA

CIRCLING

1520-1 460 (500-1)

1740-2 680 (700-2)

NA