

WAAS
CH **61337**
W36A

APP CRS
356°

Rwy Idg
5001

TDZE
1471

Apt Elev
1477

RNAV (GPS) RWY 36

ALVA RGNL (AVK)

RNP APCH-GPS.

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Vance AFB altimeter setting and increase all DA 127 feet and all MDA 140 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C visibility ¾ mile and Circling Cat C visibility ½ mile. Baro-VNAV and VDP NA when using Vance AFB altimeter setting. Circling to Rwy 9/27 NA.

MISSED APPROACH:
Climb to 3300 direct ZOKOF and hold.

AWOS-3PT
121.125

VANCE APP CON ★
126.75 346.325

UNICOM
122.8 (CTAF) 0

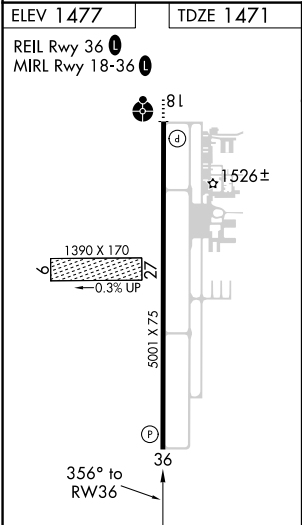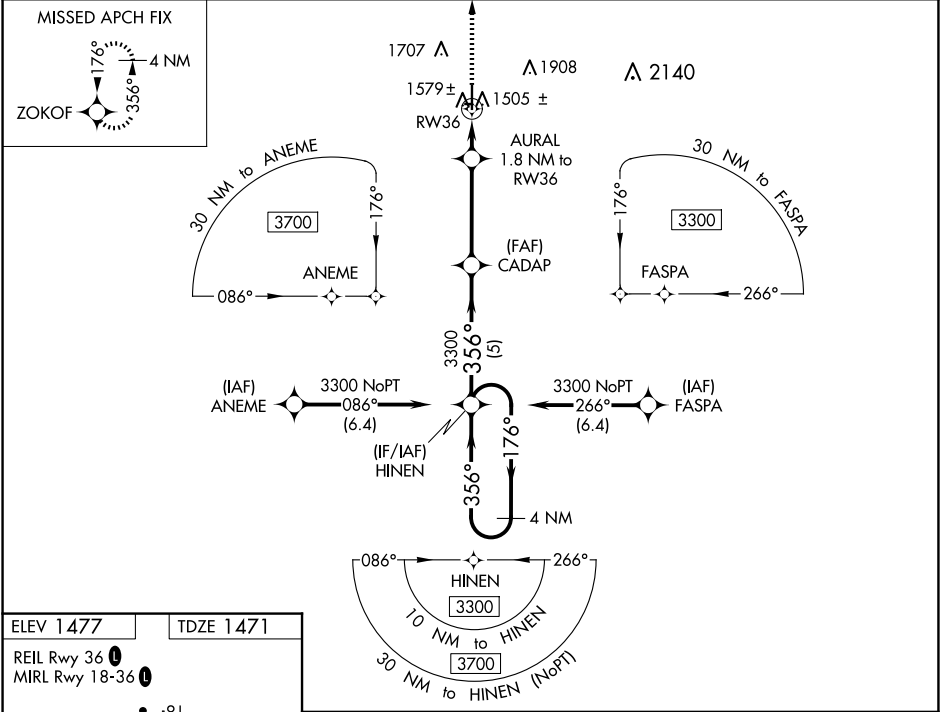

3300 ZOKOF

*LNAV only.

CADAP 3300

HINEN 4 NM Holding Pattern

*1 NM to RW36

AURAL 1.8 NM to RW36

RW36

2080*

3300

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	1721-7/8	250 (300-7/8)		NA
LNAV/VNAV DA	1751-1	280 (300-1)		NA
LNAV MDA	1840-1	369 (400-1)		NA
CIRCLING	1980-1 503 (600-1)	2120-1 643 (700-1)	2220-2¼ 743 (800-2¼)	NA