

WAAS CH 69532 W10A	APP CRS 103°	Rwy Idg 5006 TDZE 897 Apt Elev 906
--	------------------------	---

RNAV (GPS) RWY 10

L O SIMENSTAD MUNI (O/E/O)



RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using Anoka County/Blaine (Janes Fld) altimeter setting. When local altimeter setting not received, use Anoka County/Blaine (Janes Fld) altimeter setting; increase LPV DA to 1204 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1247 feet and visibility all Cats ¼ SM; increase all MDAs 60 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ¼ SM. Rwy 10 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy 4 and 22.

▲

MISSED APPROACH:
Climb to 3000 direct
ECLEY and hold.

AWOS-3 119.925	MINNEAPOLIS APP CON 121.2 335.65	GCO 121.725	CTAF 122.9 0
--------------------------	--	-----------------------	------------------------

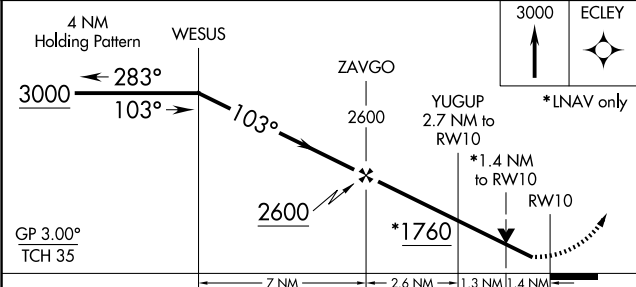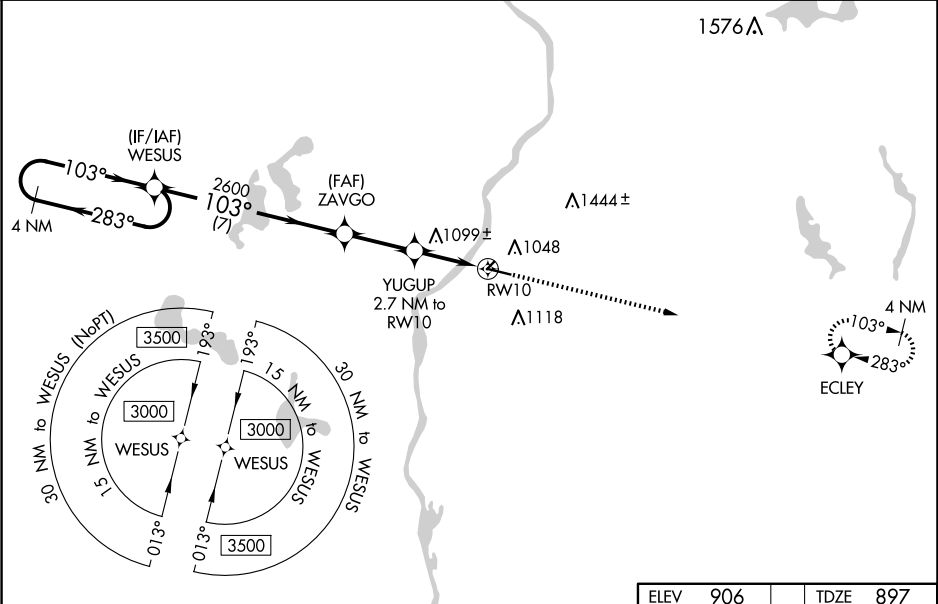

ELEV 906 TDZE 897

3000

ECLEY

*LNAV only

REIL Rwy 28 0
MIRL Rwy 10 and 28 0