

WAAS CH 45823 W34A	APP CRS 337°	Rwy Idg TDZE 15 Apt Elev 16	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 34

ABBEVILLE CHRIS CRUSTA MEML (IYA)

RNP APCH.


▼

▲

Baro-VNAV NA when using New Iberia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use New Iberia altimeter setting and increase all DA 27 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ⅛ SM.

MISSED APPROACH:
Climb to 2000 direct CIPAG and hold.

AWOS-3PT 118.875	LAFAYETTE APP CON ★ 121.1 268.7	GCO 135.075	UNICOM 122.8 (CTAF)
----------------------------	---	-----------------------	-------------------------------

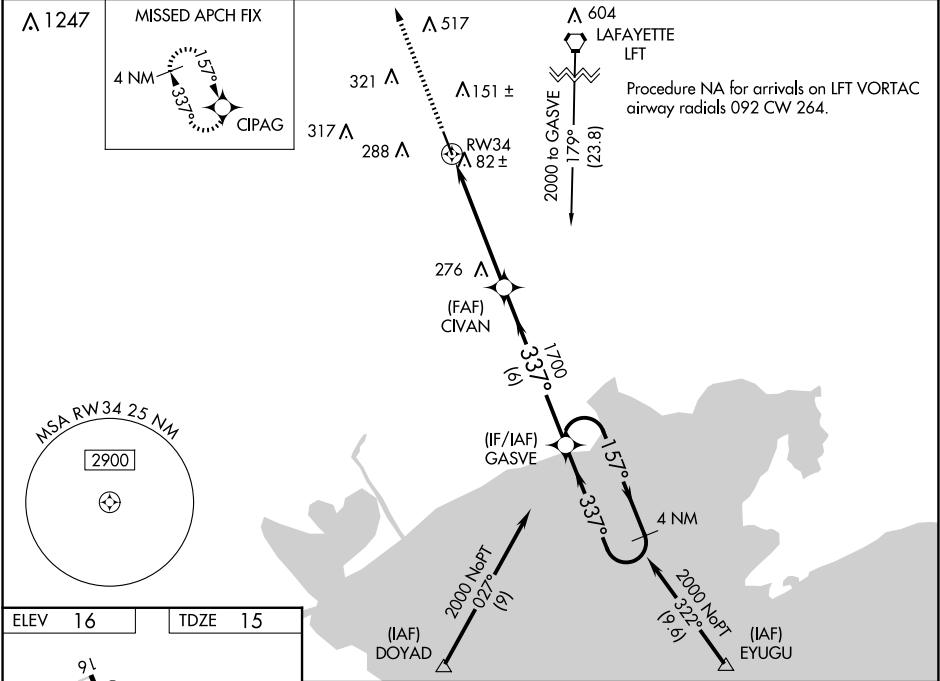

ELEV 16 TDZE 15

91

5000x75

34

337°

MIRL Rwy 15-33
REIL Rws 15 and 33

2000 CIPAG

GASVE 4 NM Holding Pattern

CIVAN 1700

RW34

1700

157°

337°

2000

GP 3.00° TCH 50

5.1 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	298-1	283 (300-1)		NA
LNAV/VNAV DA	320-1	305 (400-1)		NA
LNAV MDA	580-1	565 (600-1)	580-1½ 565 (600-1½)	NA
CIRCLING	580-1 564 (600-1)	600-1 584 (600-1)	700-2 684 (700-2)	NA

SC-4, 30 OCT 2025 to 27 NOV 2025

SC-4, 30 OCT 2025 to 27 NOV 2025