


WAAS CH 86905 W04A	APP CRS 040°	Rwy Idg 4775 TDZE 58 Apt Elev 72
--	------------------------	---


RNAV (GPS) RWY 4

EASTON/NEWNAM FLD (ESN)

RNP APCH - GPS.		MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct ORETE and hold.		
⚠ When local altimeter setting not received, use Cambridge altimeter setting; increase LPV DA to 303 feet, LNAV/VNAV DA to 670 feet and visibility ½ SM; increase all MDAs 60 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM, and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Cambridge altimeter setting. Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.				
ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF) 0	GND CON 119.075	CLNC DEL 119.075

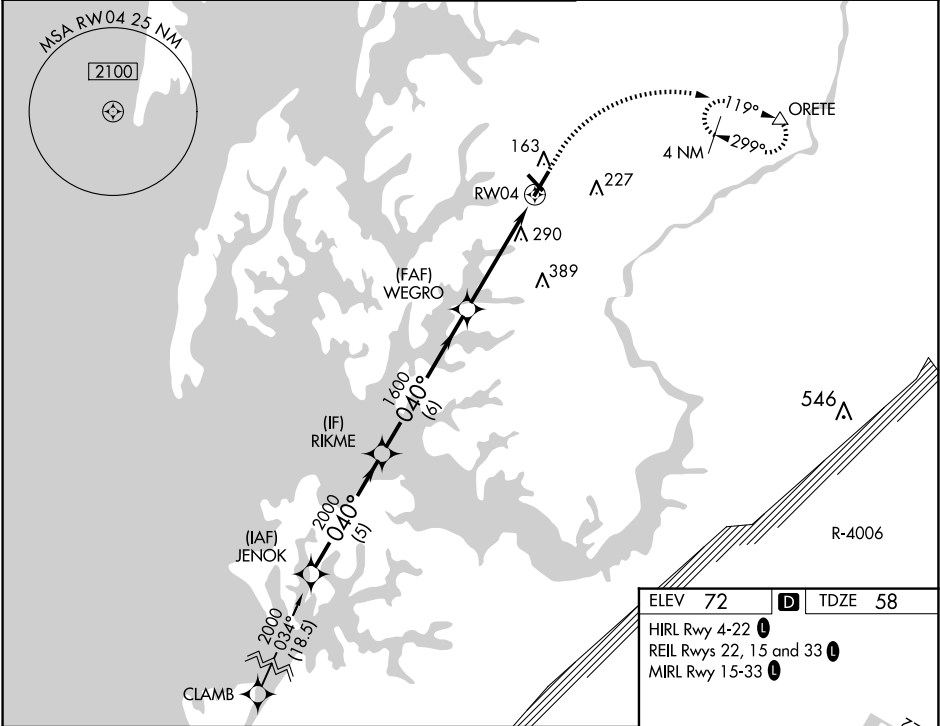

JENOK		RIKME		WEGRO		700		2000		ORETE			
2000		040°		2000		040°		1600		*1.6 NM to RW04		*LNAV only	
GP 3.00°		TCH 44		1600		1600		RW04					
		5 NM		6 NM		3.1 NM		1.6					
CATEGORY		A		B		C		D					
LPV DA				258-¾		200 (200-¾)							
LNAV/VNAV DA				625-1½		567 (600-1½)							
LNAV MDA		600-1		542 (600-1)		600-1½		542 (600-1½)					
CIRCLING		600-1		640-1		640-1½		740-2					
		528 (600-1)		568 (600-1)		568 (600-1½)		668 (700-2)					

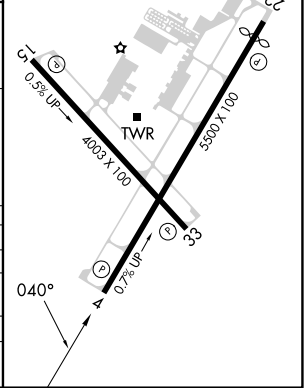

NE-3, 30 OCT 2025 to 27 NOV 2025

NE-3, 30 OCT 2025 to 27 NOV 2025