

WAAS CH 99302 W01A	APP CRS 010°	Rwy Idg TDZE 1255 Apt Elev 1255
--	------------------------	---

RNAV (GPS) RWY 1


NEOSHO HUGH ROBINSON (E/O S)

⚠ Baro-VNAV NA when using Joplin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

⚠ Visibility reduction by helicopters NA. When local altimeter setting not received, use Joplin altimeter setting and increase all DA 87 feet and all MDA 100 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ⅔ mile, and LNAV Cat C visibility ¼ mile. When VGSI inop, Straight-in/Circling to Rwy 1 NA at night.

MISSED APPROACH:
Climb to 3200 direct
TOGAS and hold.

KANSAS CITY CENTER 128.6 282.325	AUNICOM 122.8 (CTAF) 0
--	---

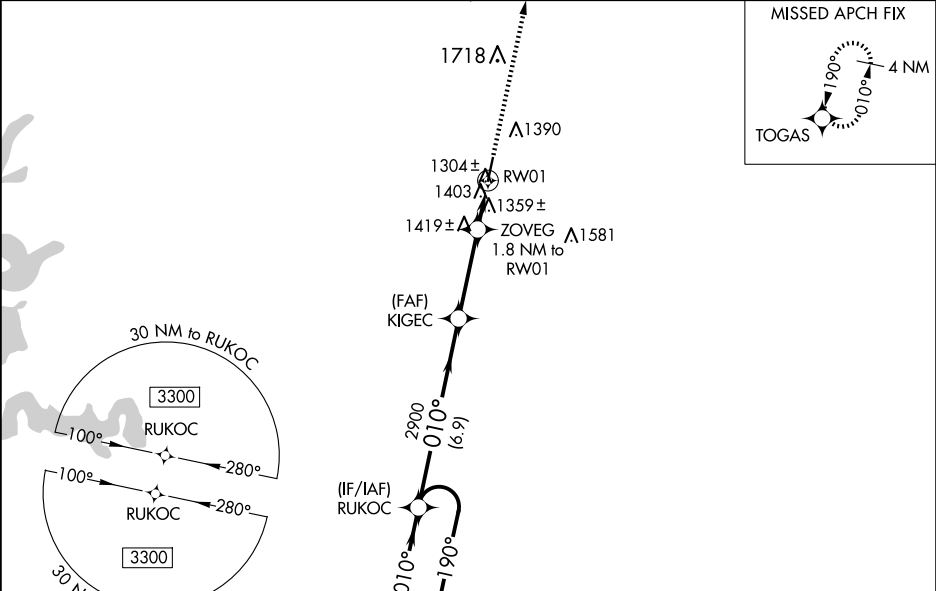

4 NM Holding Pattern 3300 ← 190° 010° → GP 3.00° TCH 31				RUKOC	KIGEC 2900	ZOVEG 1.8 NM to RW01	*LNAV only
6.9 NM 3.3 NM 1.8 NM							
CATEGORY	A	B	C	D			
LPV DA	1505-1 250 (300-1)				NA		
LNAV/VNAV DA	1658-1⅓ 403 (500-1⅓)				NA		
LNAV MDA	1680-1 425 (500-1)		1680-1¼ 425 (500-1¼)		NA		
CIRCLING	1720-1 465 (500-1)	1740-1 485 (500-1)	1740-1½ 485 (500-1½)		NA		

